

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	10HP 6P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	kW									
10	7.5	1175	230/460	60	256TD	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	kVA CODE	Class/Division Hazardous Location							
B	B	H	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
89.5	91	91.1	90	74.7	68.9	57.3

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
27.5/13.8	22.4/11.2	18.2/9.1	13.8/6.9	173.3/86.9	630

* Usable at 208V: 29.4 AMPS (FULL LOAD)

* Usable at 10HP 50Hz 380V 16.3A 970R.P.M. S.F. 1.0 EFF. 89.2% (IE3)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
44.7	250	292	225	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
4.687	137	523	68	55	306

BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6309ZZ	6309ZZ	N/A	RIGID MOUNTING	NEMA


INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0013~10	60~1200	0.112~44.7	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	1~10	120~1200	44.7	
CONSTANT HP	60~90	10	1200~1800	44.7~29.8	

DRAWING NO.	ES1AS185708	REVISION	2.1
-------------	-------------	----------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST

OUTPUT	10	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	44.7	lb-ft	FULL LOAD CURRENT	27.5/13.8	A
LOCKED ROTOR TORQUE	250	%	LOCKED-ROTOR CURRENT	630	%
BREAKDOWN TORQUE	292	%	SPEED (at FULL LOAD)	1175	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	4.687	lb-ft ²

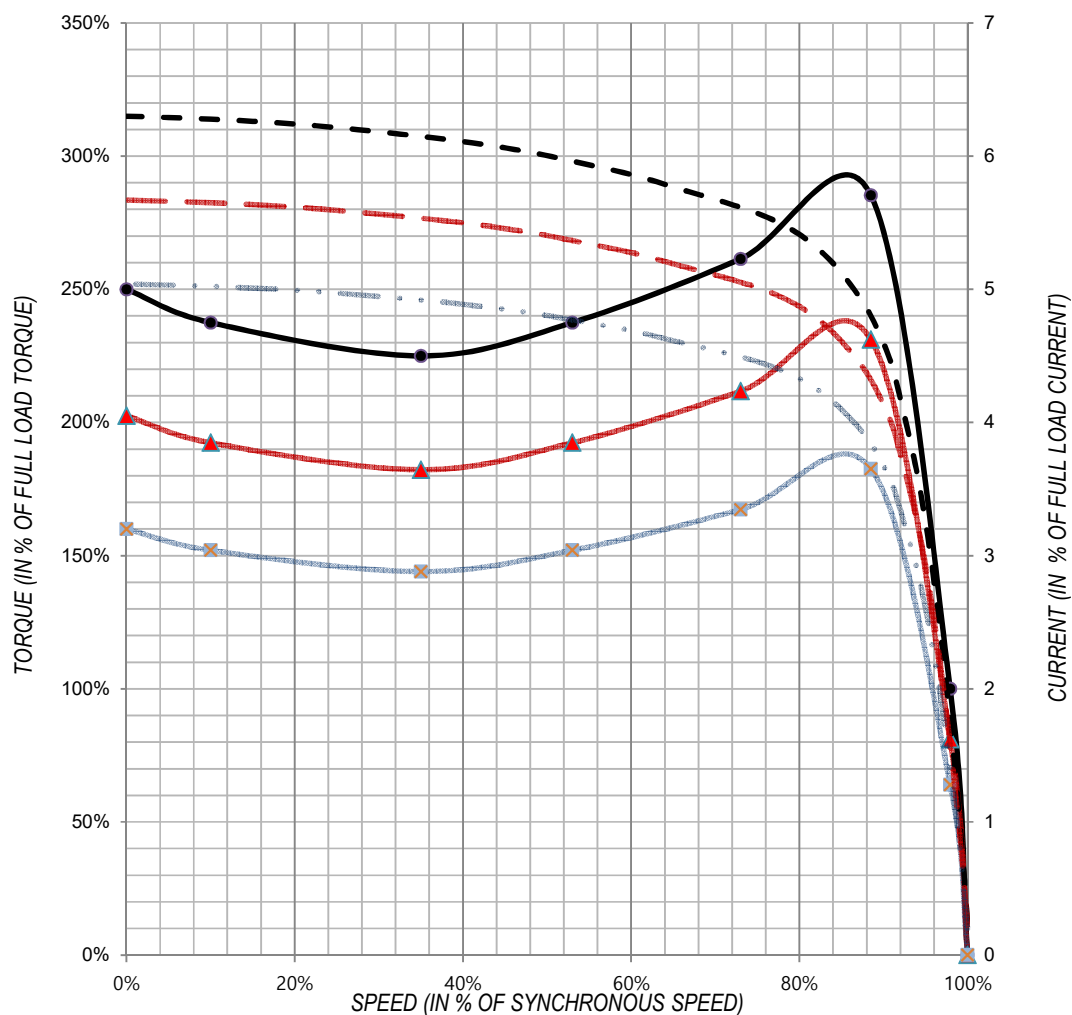


NOTE

- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- ▲- B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- ...■... C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- - - D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- - - E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- ... F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL

OUTPUT	10	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	44.7	lb-ft	FULL LOAD CURRENT	27.5/13.8	A
LOCKED ROTOR TORQUE	250	%	LOCKED-ROTOR CURRENT	630	%
BREAKDOWN TORQUE	292	%	SPEED (at FULL LOAD)	1175	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	4.687	lb-ft ²

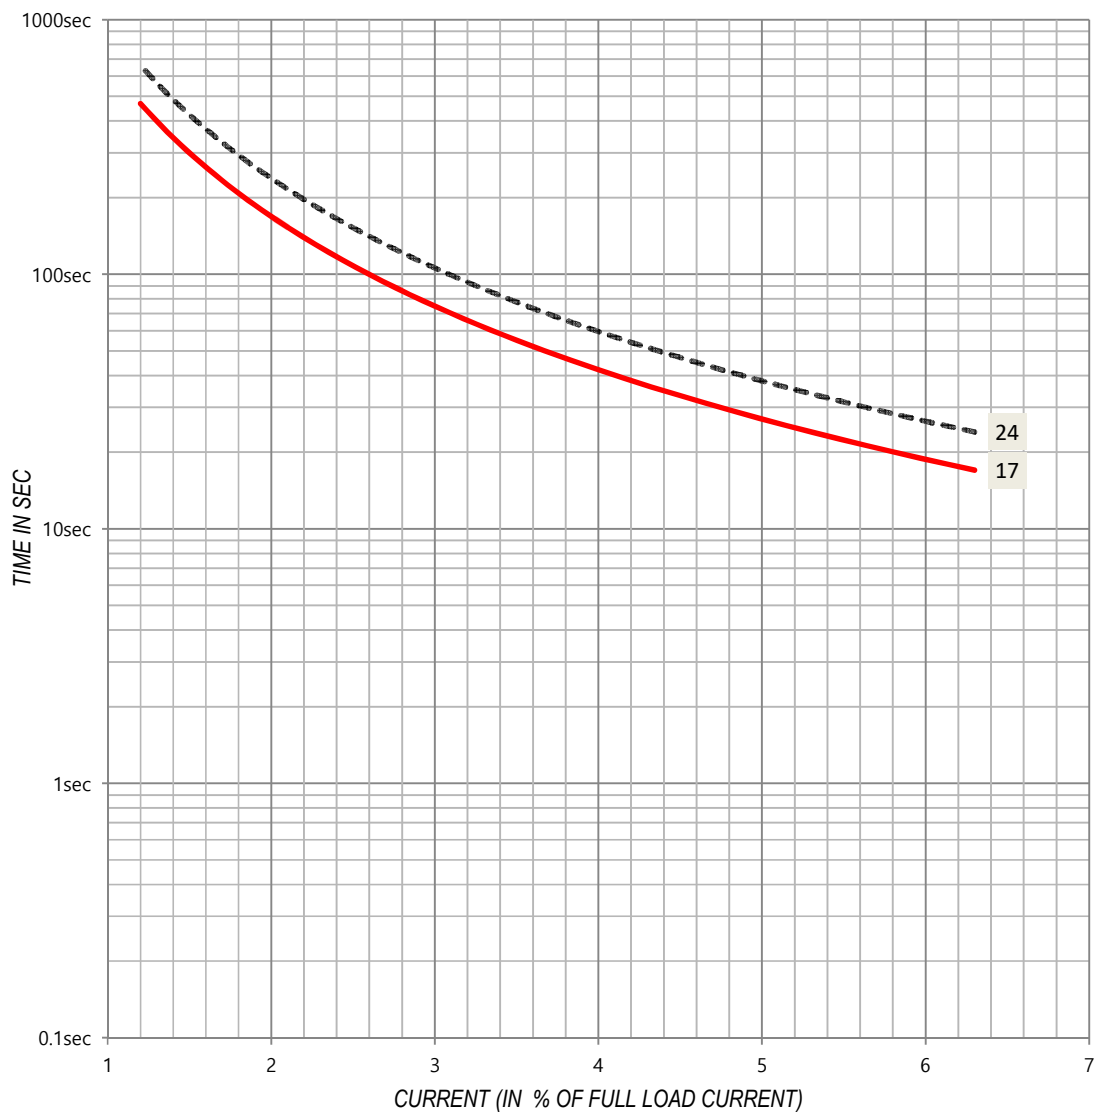


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- - - B : THERMAL LIMIT CURVE AT COLD CONDITION
- - - C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- - - D : * LOAD GD2 AT MOTOR SHAFT
- - - E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE

OUTPUT	10	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	44.7	lb-ft	FULL LOAD CURRENT	27.5/13.8	A
LOCKED ROTOR TORQUE	250	%	LOCKED-ROTOR CURRENT	630	%
BREAKDOWN TORQUE	292	%	SPEED (at FULL LOAD)	1175	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	4.687	lb-ft ²

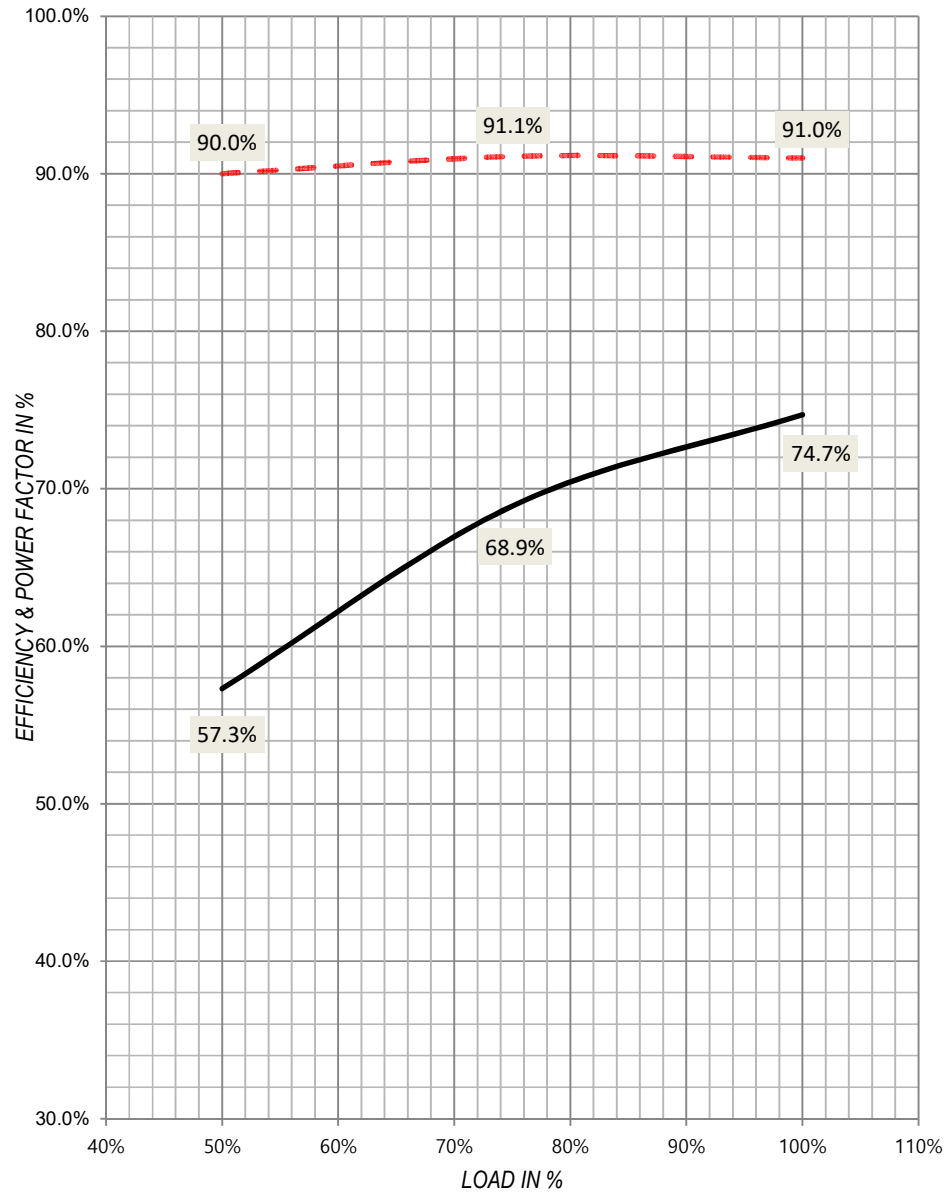

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOTAGE - STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART- WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION			DOUBLE VOTAGE - STAR-DELTA AND PART WINDING (ot LOW VOLTAGE) CONNECTION				
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE	
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING				

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.