

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	1HP 2P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
1	0.75	3460	230/460	60	143T	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	KVA CODE	Class/Division Hazardous Location							
B	B	L	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
74.0	77	76.9	74.6	88.7	84.9	76

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
2.7/1.4	2.2/1.1	1.7/0.8	1.0/0.5	24.3/12.6	900

* Usable at 208V: 3 AMPS (FULL LOAD)

* Usable at 1HP 50Hz 380V 1.7A 2815R.P.M. S.F. 1.0 EFF. 73.9% (IE1)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
1.5	340	390	307	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
0.053	1	3	67	55	49


BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6205ZZ	6204ZZ	N/A	RIGID MOUNTING	NEMA

INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0001~1	180~3600	0.004~1.5	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	0.1~1	360~3600	1.5	
CONSTANT HP	60~90	1	3600~5400	1.5~1	

DRAWING NO.	ES1AS180401	REVISION	2.1
--------------------	-------------	-----------------	-----


ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST
OUTPUT	1	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	1.5	lb-ft	FULL LOAD CURRENT	2.7/1.4	A
LOCKED ROTOR TORQUE	340	%	LOCKED-ROTOR CURRENT	900	%
BREAKDOWN TORQUE	390	%	SPEED (at FULL LOAD)	3460	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.053	lb-ft ²

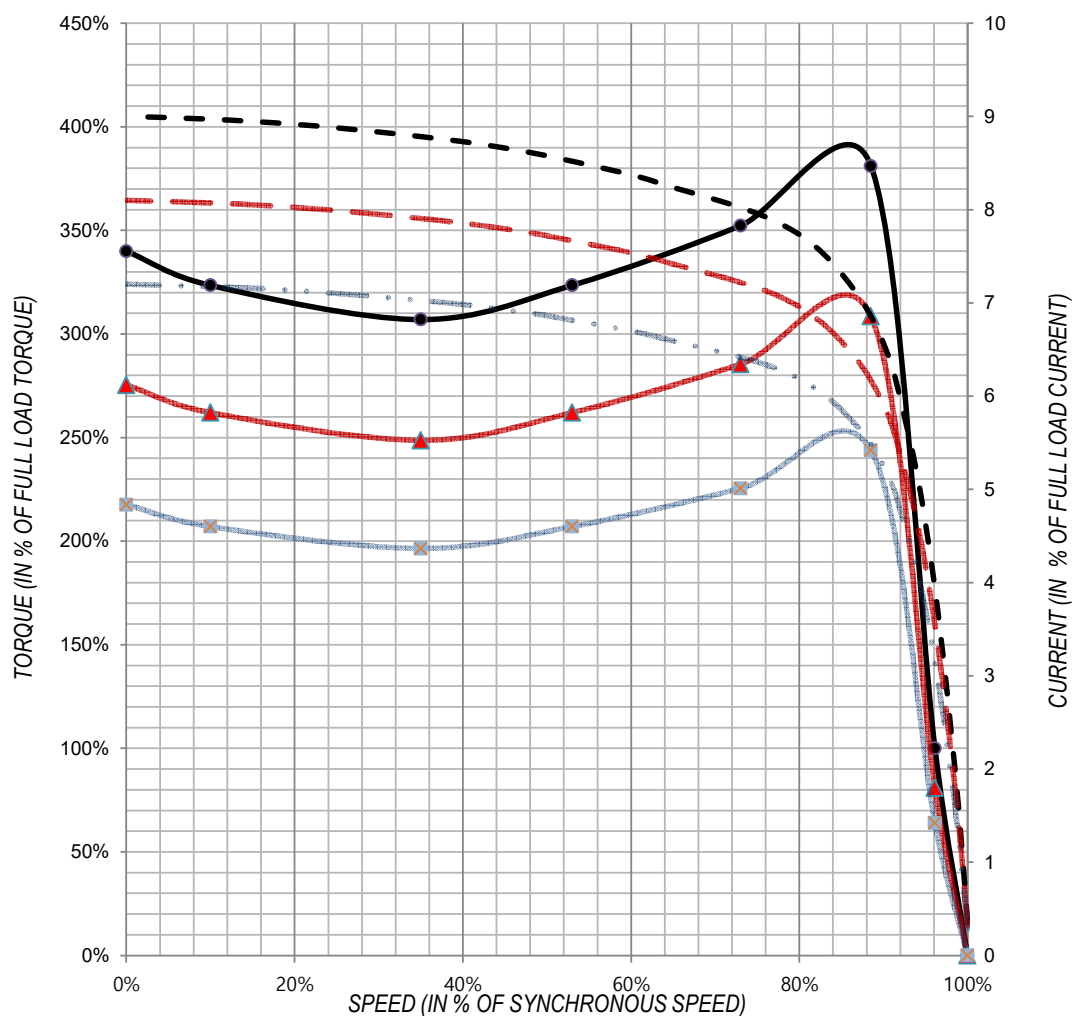

NOTE		A : SPEED-TORQUE CURVE AT	100% RATED VOLTAGE
		B : SPEED-TORQUE CURVE AT	90% RATED VOLTAGE
		C : SPEED-TORQUE CURVE AT	80% RATED VOLTAGE
		D : SPEED-CURRENT CURVE AT	100% RATED VOLTAGE
		E : SPEED-CURRENT CURVE AT	90% RATED VOLTAGE
		F : SPEED-CURRENT CURVE AT	80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR			THERMAL LIMIT & TIME - CURRENT CURVE		Curve No.	
					1TL	
OUTPUT	1	HP	POLES	2	P	
VOLTAGE	230/460	V	FREQUENCY	60	Hz	
FULL LOAD TORQUE	1.5	lb-ft	FULL LOAD CURRENT	2.7/1.4	A	
LOCKED ROTOR TORQUE	340	%	LOCKED-ROTOR CURRENT	900	%	
BREAKDOWN TORQUE	390	%	SPEED (at FULL LOAD)	3460	RPM	
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.053	lb-ft ²	

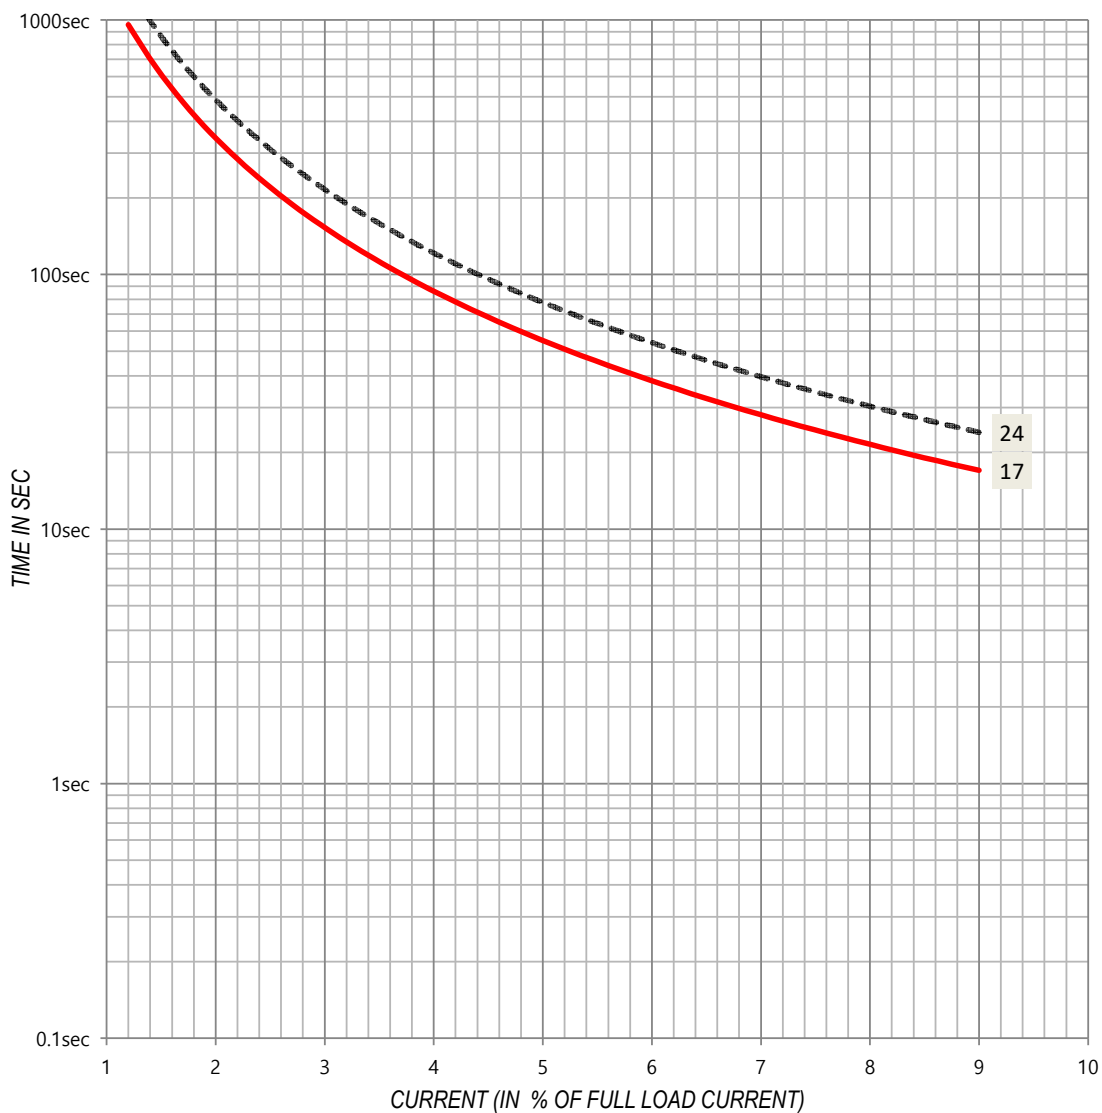

- NOTE
- A : THERMAL LIMIT CURVE AT HOT CONDITION


B : THERMAL LIMIT CURVE AT COLD CONDITION

C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN

D : * LOAD GD2 AT MOTOR SHAFT

E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE
OUTPUT	1	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	1.5	lb-ft	FULL LOAD CURRENT	2.7/1.4	A
LOCKED ROTOR TORQUE	340	%	LOCKED-ROTOR CURRENT	900	%
BREAKDOWN TORQUE	390	%	SPEED (at FULL LOAD)	3460	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.053	lb-ft ²

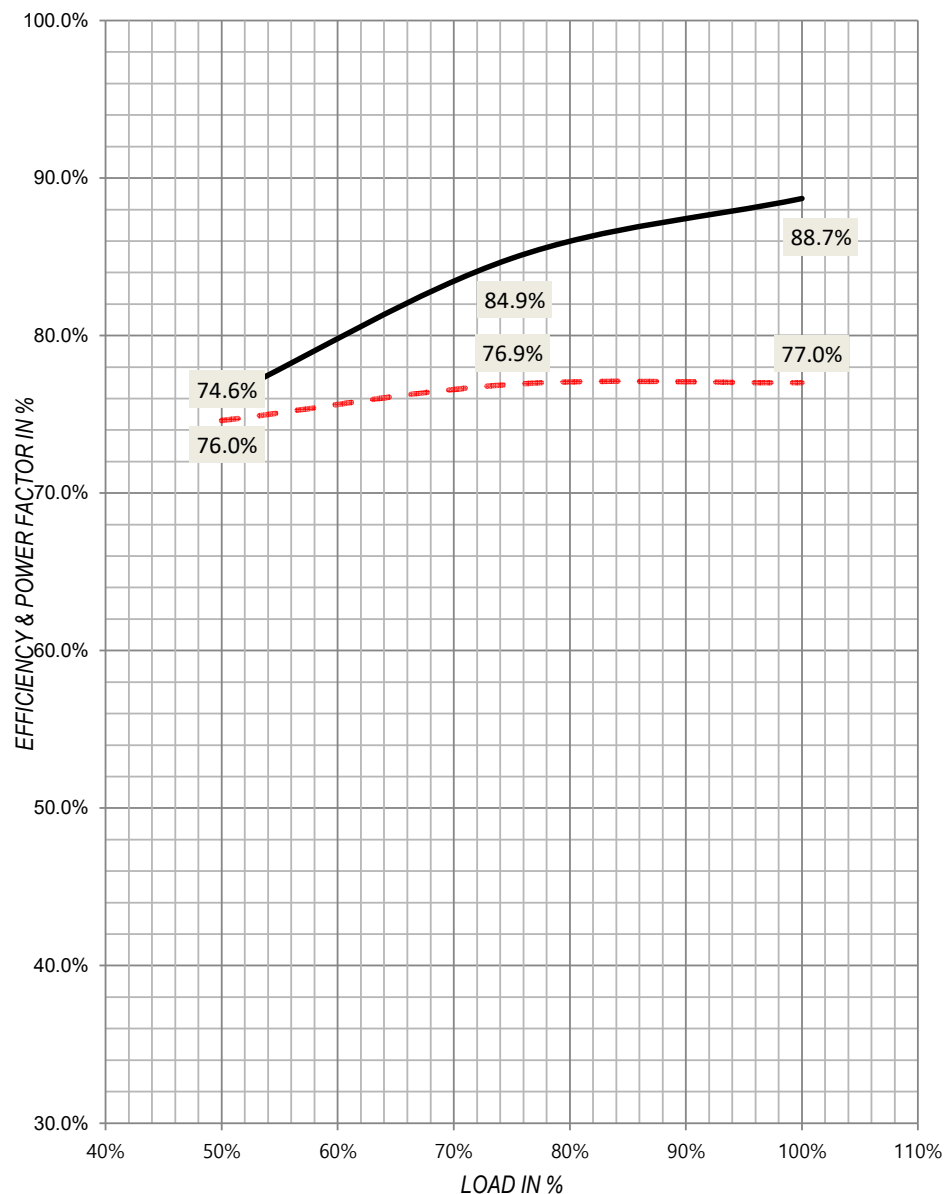

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOLTAGE-STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
				DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING	

SINGLE VOLTAGE PART-WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION		DOUBLE VOLTAGE-STAR-DELTA AND PART WINDING (at LOW VOLTAGE) CONNECTION					
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE	
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN
		LOW VOLTAGE PART-WINDING STARTING		HIGH VOLTAGE DIRECT-ON-LINE STARTING		LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING			

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.