

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	25HP 2P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
25	18.5	3545	575	60	284TS	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	KVA CODE	Class/Division Hazardous Location							
B	B	G	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
90.2	91.7	91.5	90.3	86.7	83.5	75.9

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
23.6	18.4	13.7	6.6	141.6	600

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
37.1	185	230	155	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
2.367	26	81	75	55	362


BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6312ZZ	6310ZZ	N/A	RIGID MOUNTING	NEMA

INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0031~25	180~3600	0.093~37.1	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	2.5~25	360~3600	37.1	
CONSTANT HP	60~90	25	3600~5400	37.1~24.733	

DRAWING NO.	ES1AS180409	REVISION	0.1
--------------------	-------------	-----------------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.


HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST
OUTPUT	25	HP	POLES	2	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	37.1	lb-ft	FULL LOAD CURRENT	23.6	A
LOCKED ROTOR TORQUE	185	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	230	%	SPEED (at FULL LOAD)	3545	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	2.367	lb-ft ²

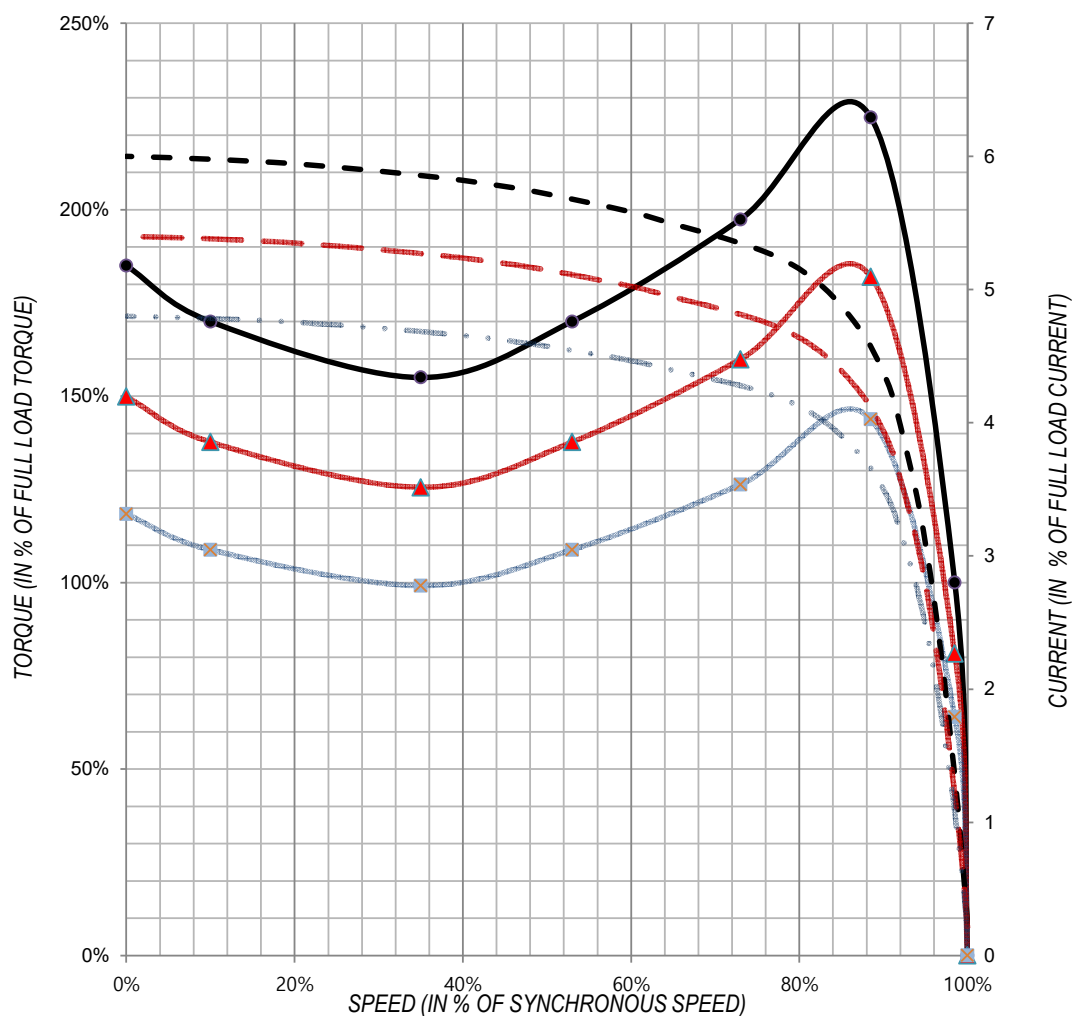

NOTE

- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- ▲- B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- ...■... C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- - - D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- - - E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- ... F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE


HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE			Curve No.	
				1TL	
OUTPUT	25	HP	POLES	2	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	37.1	lb-ft	FULL LOAD CURRENT	23.6	A
LOCKED ROTOR TORQUE	185	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	230	%	SPEED (at FULL LOAD)	3545	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	2.367	lb-ft ²

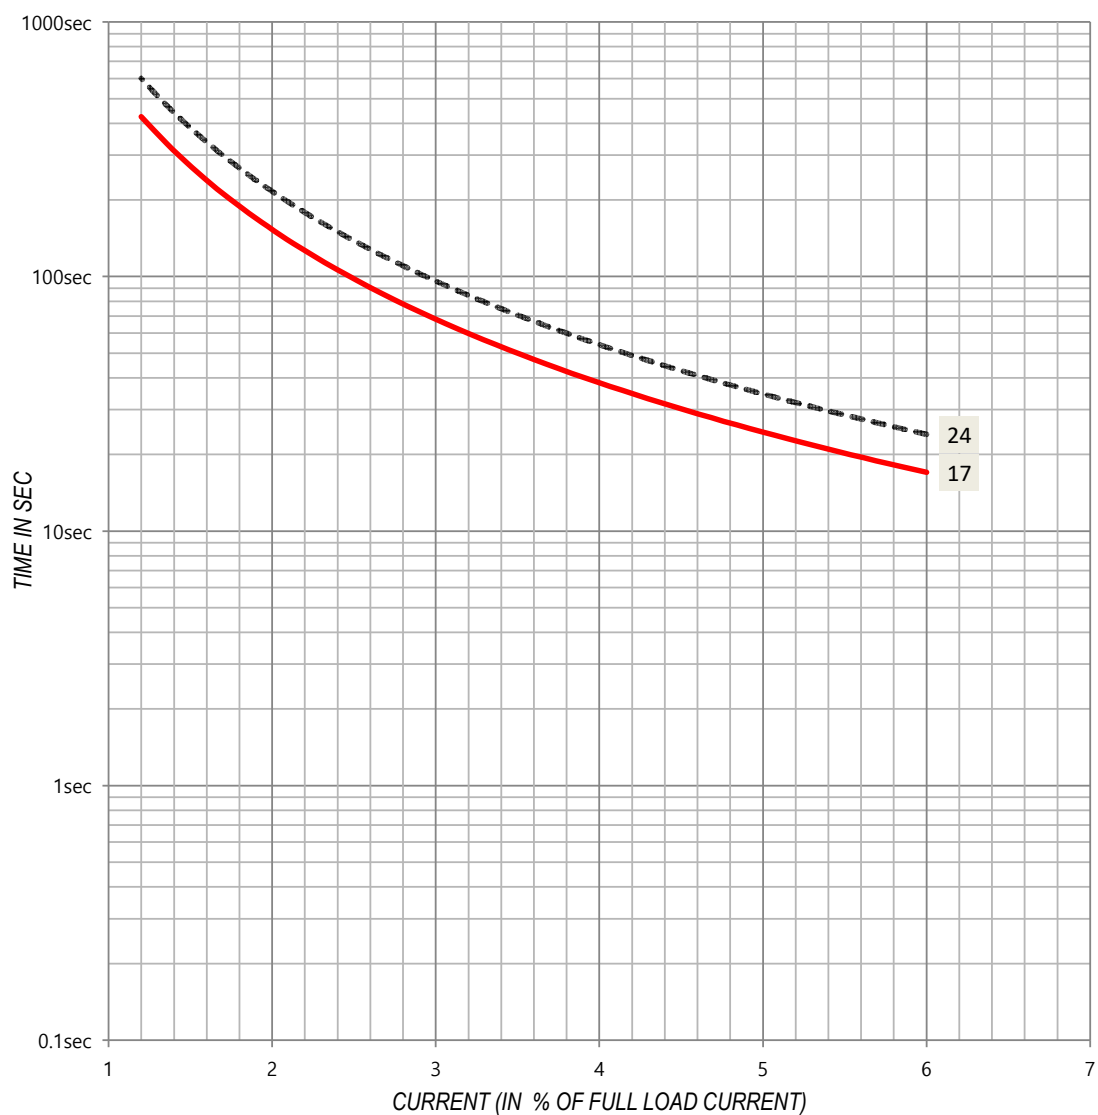

NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- - - B : THERMAL LIMIT CURVE AT COLD CONDITION
- · — C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- · - D : * LOAD GD² AT MOTOR SHAFT
- · - E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE
OUTPUT	25	HP	POLES	2	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	37.1	lb-ft	FULL LOAD CURRENT	23.6	A
LOCKED ROTOR TORQUE	185	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	230	%	SPEED (at FULL LOAD)	3545	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	2.367	lb-ft ²

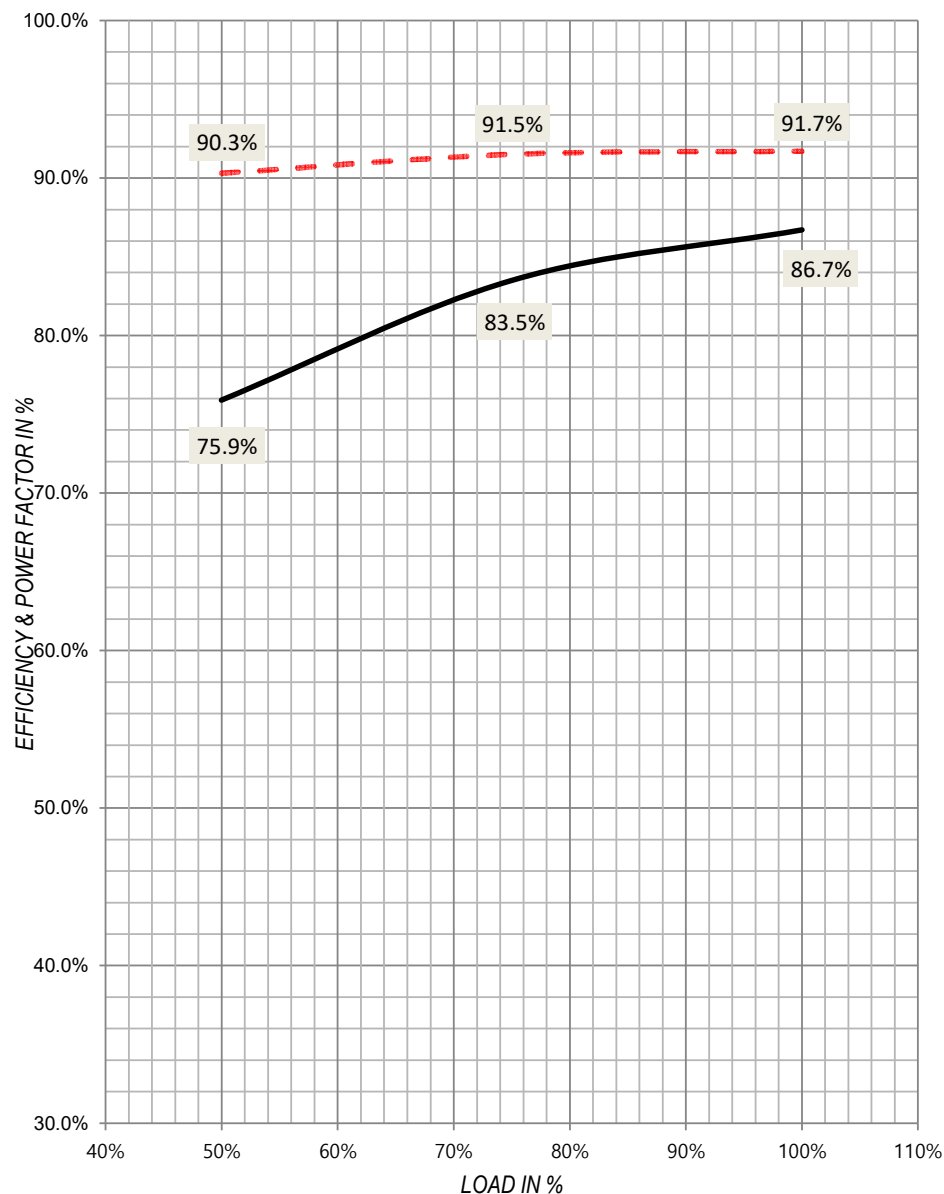

NOTE

- A : LOAD - POWER FACTOR CURVE
- B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOLTAGE-STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART- WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION			DOUBLE VOLTAGE-STAR-DELTA AND PART WINDING (at LOW VOLTAGE) CONNECTION					
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE		
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING					

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.