

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	5HP 4P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
5	3.7	1760	230/460	60	184T	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	KVA CODE	Class/Division Hazardous Location							
B	B	H	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
87.5	89.5	90.3	90.1	80	74.3	62.5

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
13.1/6.5	10.5/5.2	8.3/4.2	6.6/3.3	86.5/42.9	660

* Usable at 208V: 13.8 AMPS (FULL LOAD)

* Usable at 5HP 50Hz 380V 7.8A 1445R.P.M. S.F. 1.0 EFF. 86.3% (IE1)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
14.9	200	235	167	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
0.421	27	64	68	55	102


BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6207ZZ	6206ZZ	N/A	RIGID MOUNTING	NEMA

INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0006~5	90~1800	0.037~14.9	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	0.5~5	180~1800	14.9	
CONSTANT HP	60~90	5	1800~2700	14.9~9.933	

DRAWING NO.	ES1AS180404	REVISION	2.1
--------------------	-------------	-----------------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.


HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST
OUTPUT	5	HP	POLES	4	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	14.9	lb-ft	FULL LOAD CURRENT	13.1/6.5	A
LOCKED ROTOR TORQUE	200	%	LOCKED-ROTOR CURRENT	660	%
BREAKDOWN TORQUE	235	%	SPEED (at FULL LOAD)	1760	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.421	lb-ft ²

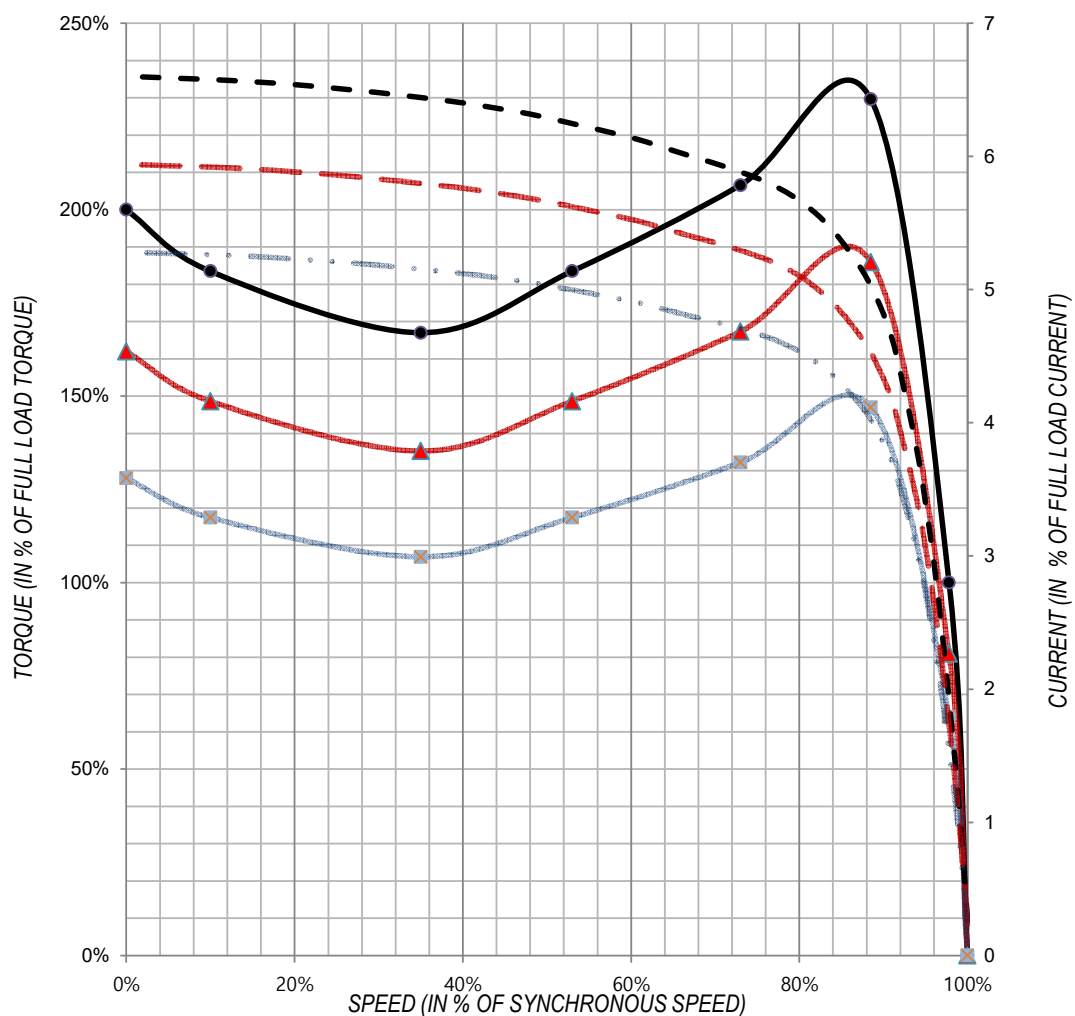

NOTE


- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- ▲ B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR			THERMAL LIMIT & TIME - CURRENT CURVE		Curve No.	
					1TL	
OUTPUT	5	HP	POLES	4	P	
VOLTAGE	230/460	V	FREQUENCY	60	Hz	
FULL LOAD TORQUE	14.9	lb-ft	FULL LOAD CURRENT	13.1/6.5	A	
LOCKED ROTOR TORQUE	200	%	LOCKED-ROTOR CURRENT	660	%	
BREAKDOWN TORQUE	235	%	SPEED (at FULL LOAD)	1760	RPM	
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.421	lb-ft ²	

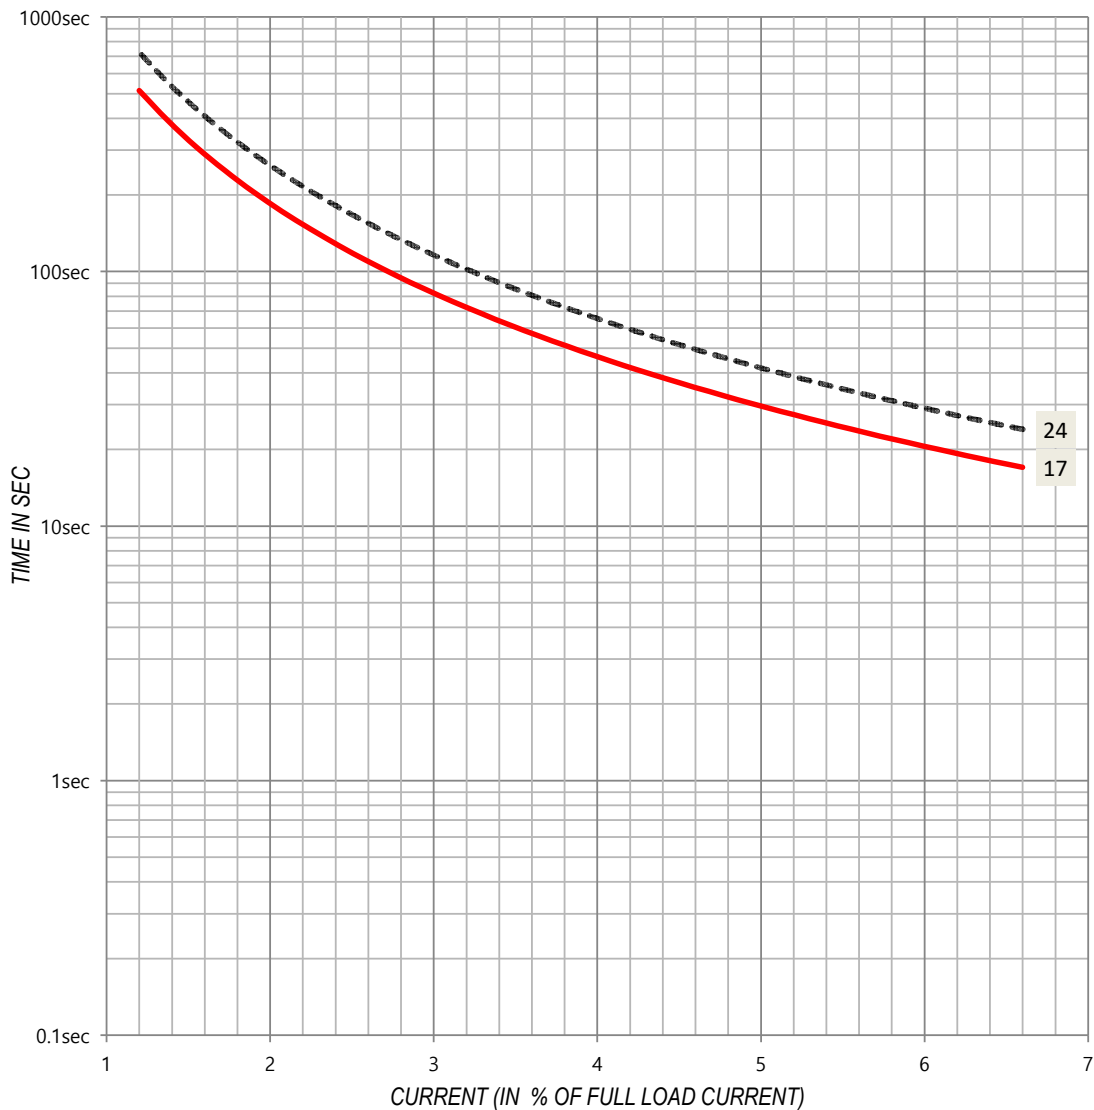

NOTE		
—	A :	THERMAL LIMIT CURVE AT HOT CONDITION
- - - - -	B :	THERMAL LIMIT CURVE AT COLD CONDITION
— — — — —	C :	※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- · - · -	D :	* LOAD GD2 AT MOTOR SHAFT
- · - · -	E :	* SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE
OUTPUT	5	HP	POLES	4	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	14.9	lb-ft	FULL LOAD CURRENT	13.1/6.5	A
LOCKED ROTOR TORQUE	200	%	LOCKED-ROTOR CURRENT	660	%
BREAKDOWN TORQUE	235	%	SPEED (at FULL LOAD)	1760	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.421	lb-ft ²

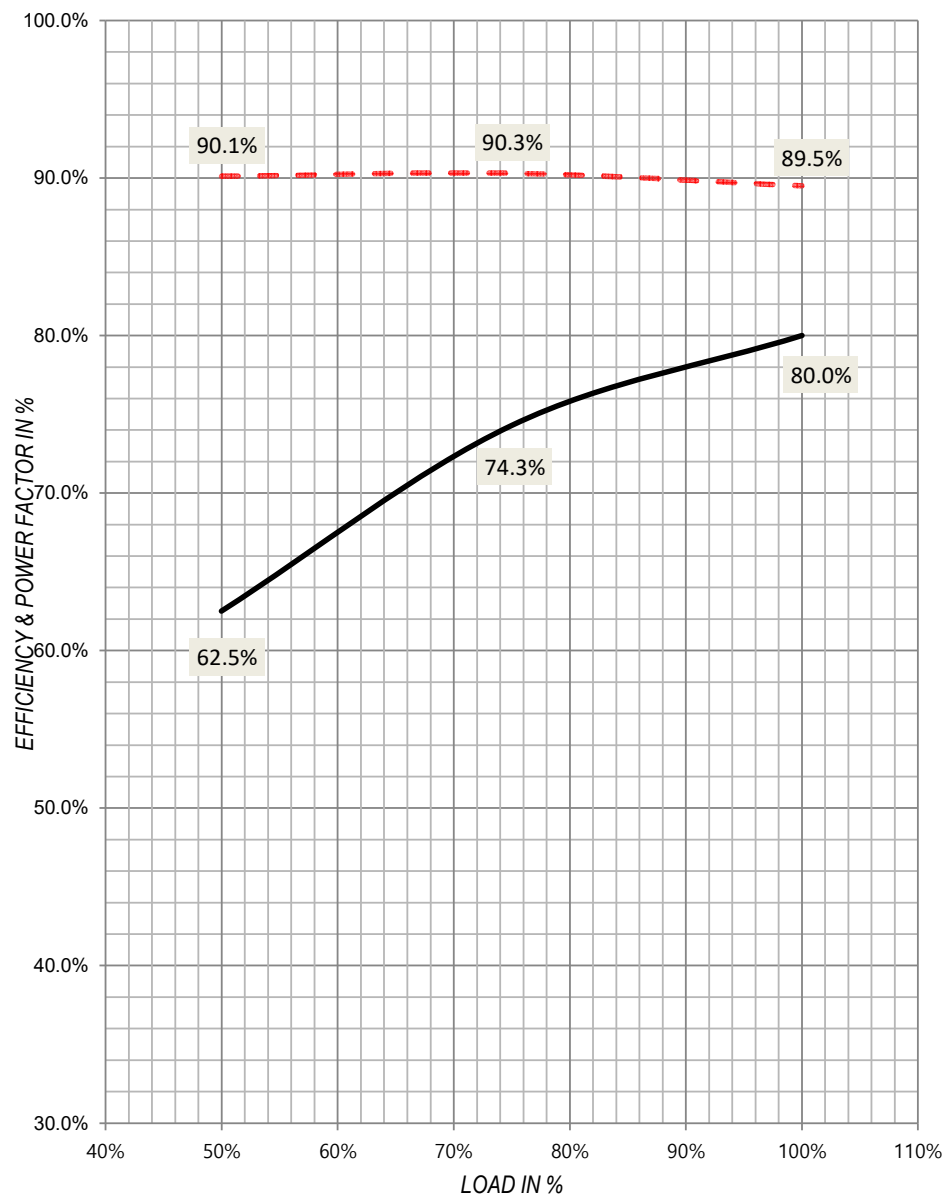

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOLTAGE-STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART- WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION			DOUBLE VOLTAGE-STAR-DELTA AND PART WINDING (at LOW VOLTAGE) CONNECTION					
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE		
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING					

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.