


SPEED - TORQUE & CURRENT CURVE

Curve No.	
1ST_DSML20293H	

OUTPUT	2.2 kW	POLES	2 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	0.6 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	380 %	LOCKED-ROTOR CURRENT	1010 %
BREAKDOWN TORQUE	430 %	SPEED (at FULL LOAD)	3490 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	0.014 kg·m ²

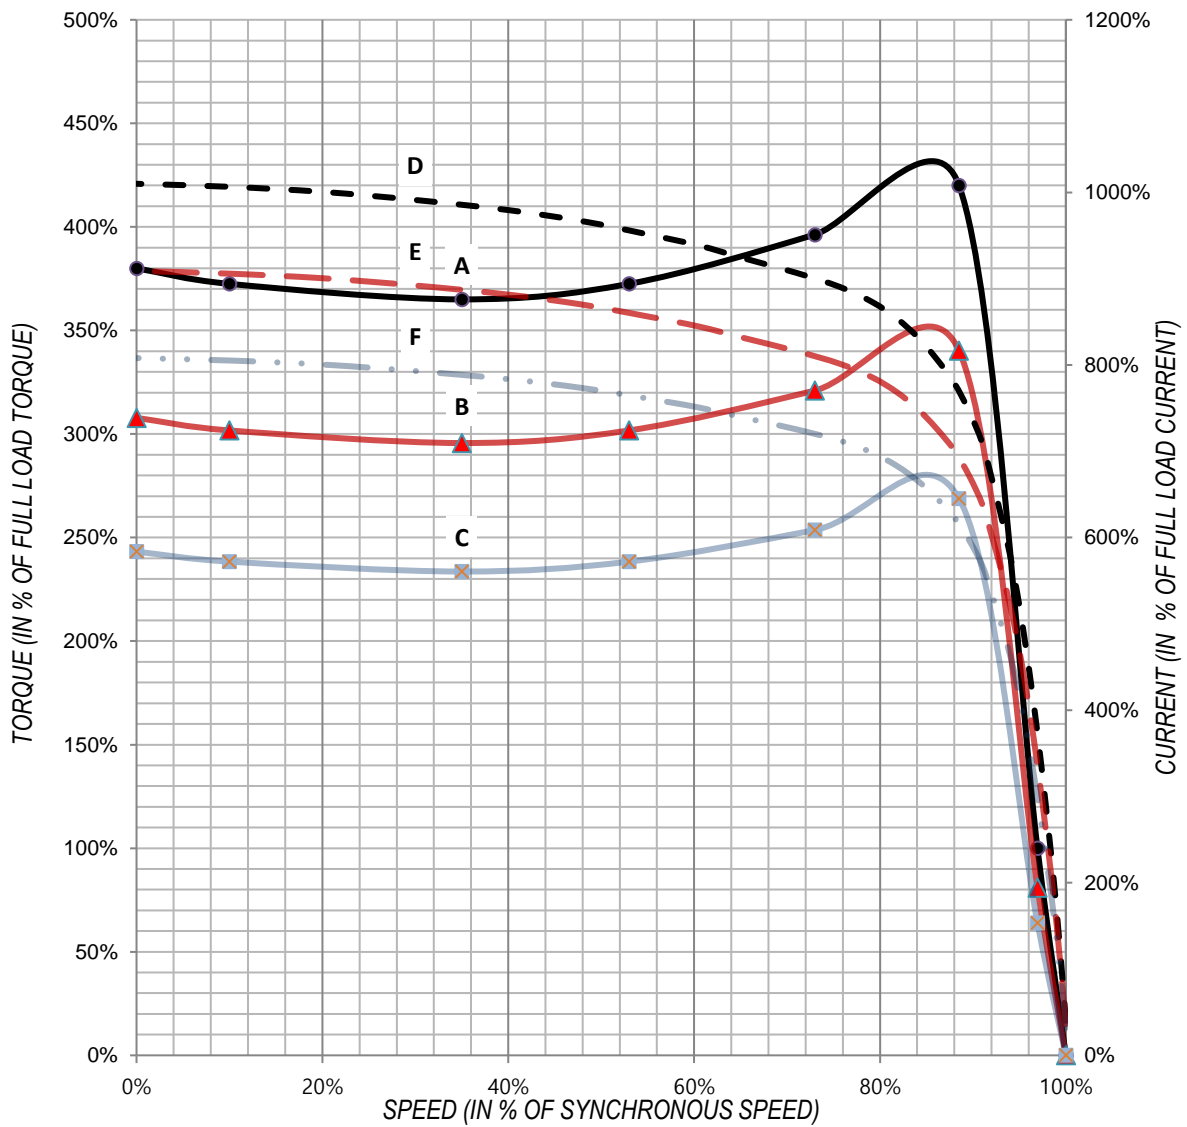


NOTE

- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- ▲— B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- - - D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- - - E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- · · F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

	THERMAL LIMIT & TIME - CURRENT CURVE			Curve No.	
				1TL_DSML20293H	

OUTPUT	2.2 kW	POLES	2 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	0.6 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	380 %	LOCKED-ROTOR CURRENT	1010 %
BREAKDOWN TORQUE	430 %	SPEED (at FULL LOAD)	3490 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	0.014 kg·m ²

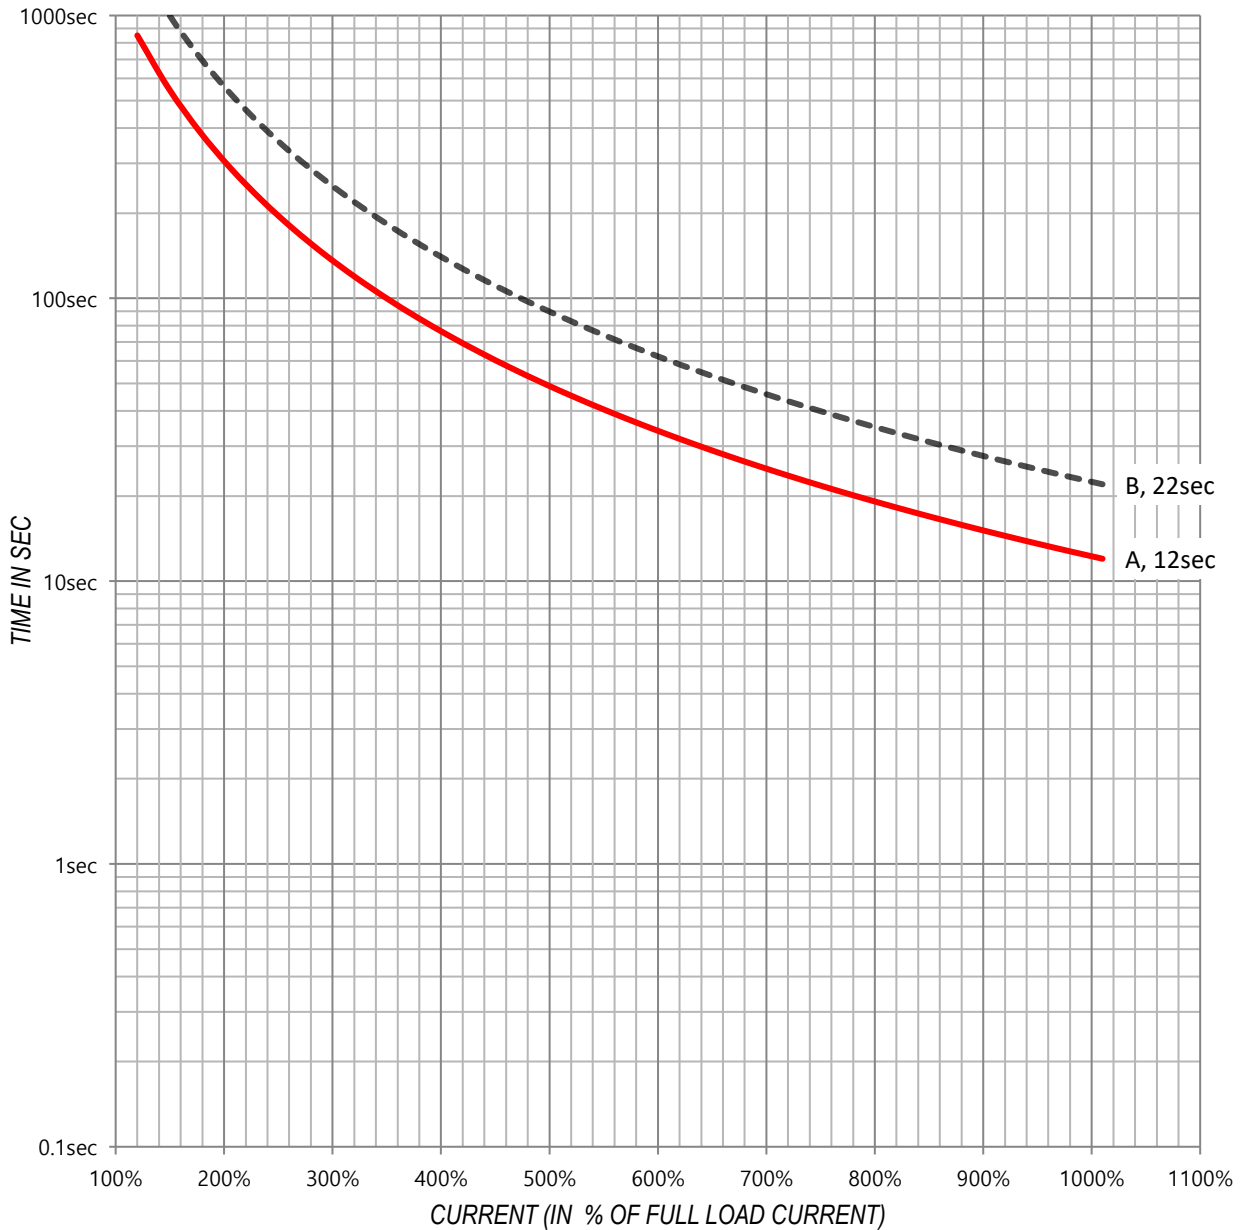


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- - - - - B : THERMAL LIMIT CURVE AT COLD CONDITION
- - - - - C ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- · - · - D * LOAD GD² AT MOTOR SHAFT
- · · · · E * SPEED-TORQUE CURVE OF LOAD

	LOAD - POWER FACTOR & EFFICIENCY CURVE		Curve No.	
			1PE_DSML20293H	

OUTPUT	2.2 kW	POLES	2 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	0.6 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	380 %	LOCKED-ROTOR CURRENT	1010 %
BREAKDOWN TORQUE	430 %	SPEED (at FULL LOAD)	3490 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	0.014 kg·m ²

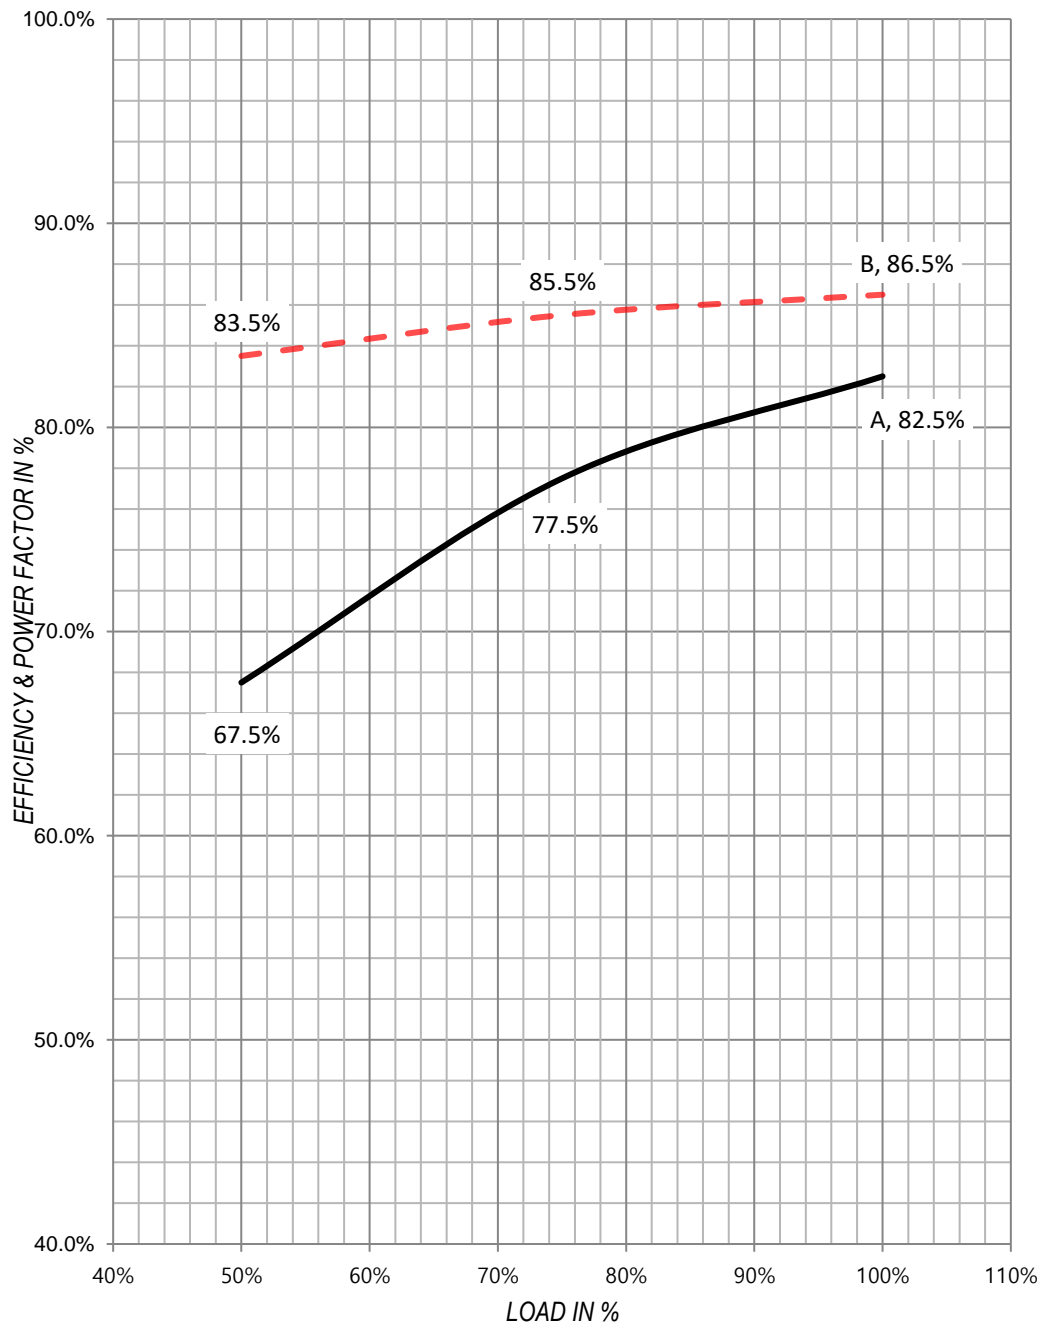

NOTE

A : LOAD - POWER FACTOR CURVE
 B : LOAD - EFFICIENCY CURVE