
HYOSUNG HEAVY INDUSTRIES


SPEED - TORQUE & CURRENT CURVE

Curve No.

1ST_DSML20967H

OUTPUT	3.7	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	3.1	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	230	%	SPEED (at FULL LOAD)	1175	r/min
GD ² of LOAD :	-	$kg \cdot m^2$	GD ² of MOTOR	0.288	kg·m²

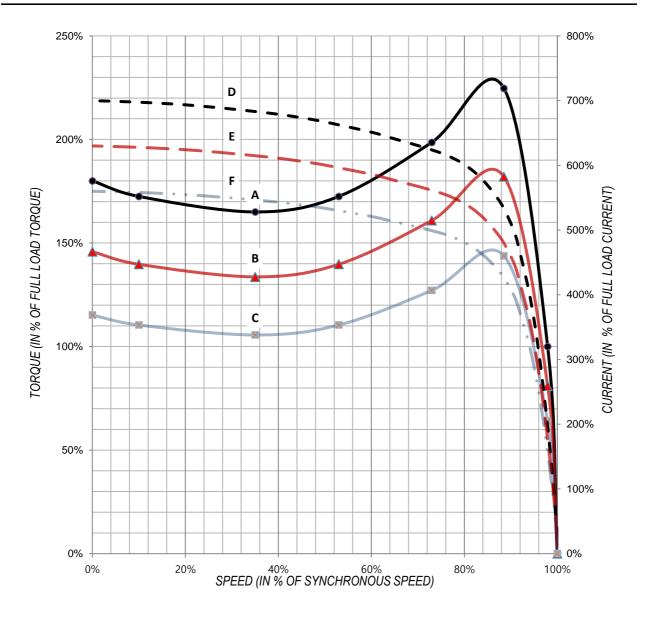

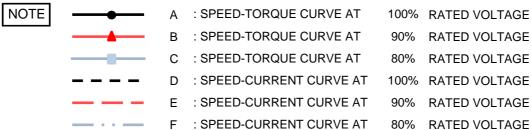




THERMAL LIMIT & TIME - CURRENT CURVE

Curve No.

1TL_DSML20967H

OUTPUT	3.7	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	3.1	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	230	%	SPEED (at FULL LOAD)	1175	r/min
GD ² of LOAD :	-	$kg \cdot m^2$	GD ² of MOTOR	0.288	$kg \cdot m^2$

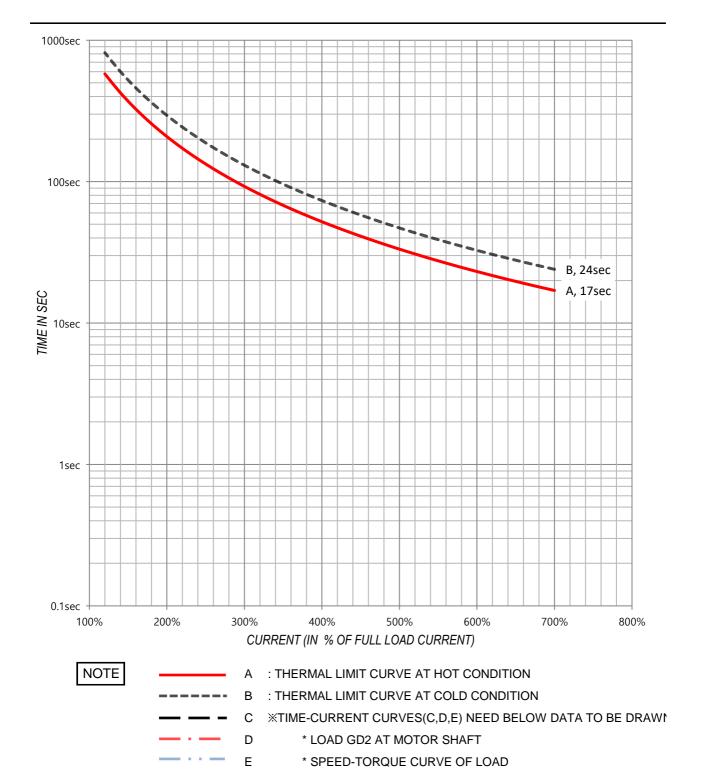


HYOSUNG HEAVY INDUSTRIES

LOAD - POWER FACTOR & EFFICIENCY CURVE

Curve No.

1PE_DSML20967H

OUTPUT	3.7	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	3.1	kg∙m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	230	%	SPEED (at FULL LOAD)	1175	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	0.288	$kg \cdot m^2$

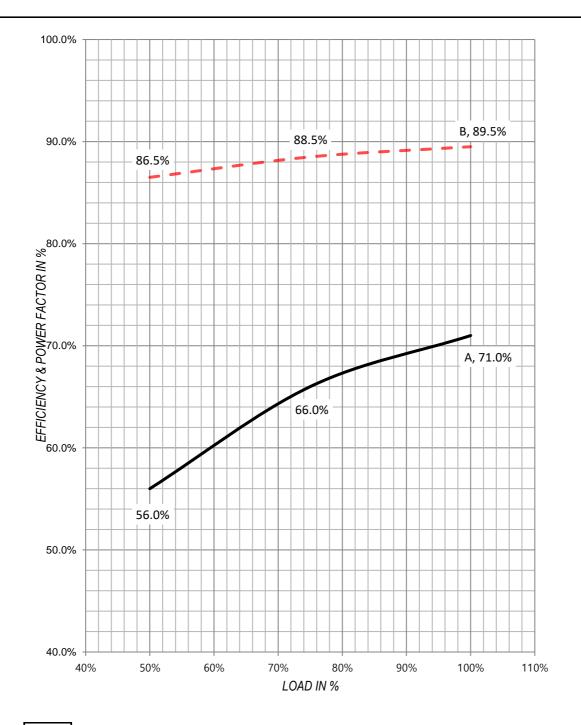

NOTE

A : LOAD - POWER FACTOR CURVE

B : LOAD - EFFICIENCY CURVE