
HYOSUNG HEAVY INDUSTRIES

SPEED - TORQUE & CURRENT CURVE

Curve No.

1ST_DSML21191M

OUTPUT	2.2	kW	POLES	4	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	1.2	kg∙m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	270	%	LOCKED-ROTOR CURRENT	900	%
BREAKDOWN TORQUE	320	%	SPEED (at FULL LOAD)	1765	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	0.055	kg·m²

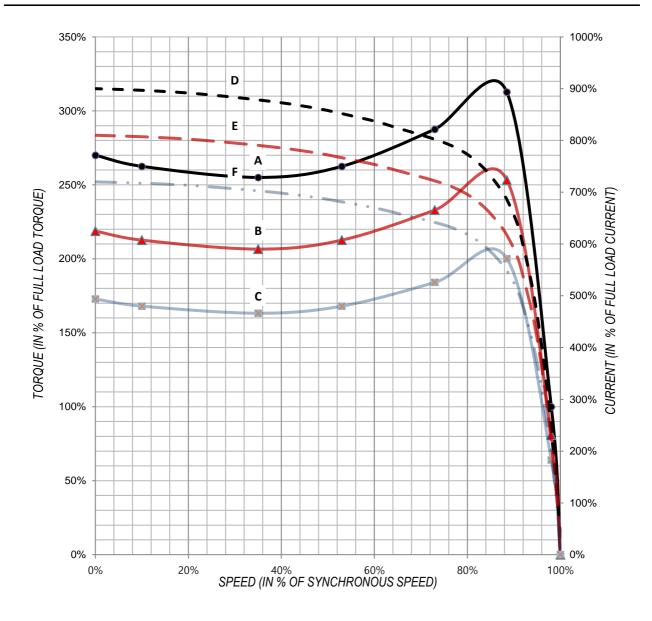

NOTE 100% RATED VOLTAGE : SPEED-TORQUE CURVE AT : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE : SPEED-CURRENT CURVE AT RATED VOLTAGE 90% : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE




THERMAL LIMIT & TIME - CURRENT CURVE

Curve No.

1TL_DSML21191M

OUTPUT	2.2	kW	POLES	4	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	1.2	kg∙m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	270	%	LOCKED-ROTOR CURRENT	900	%
BREAKDOWN TORQUE	320	%	SPEED (at FULL LOAD)	1765	r/min
GD ² of LOAD :	-	$kg \cdot m^2$	GD ² of MOTOR	0.055	kg·m²

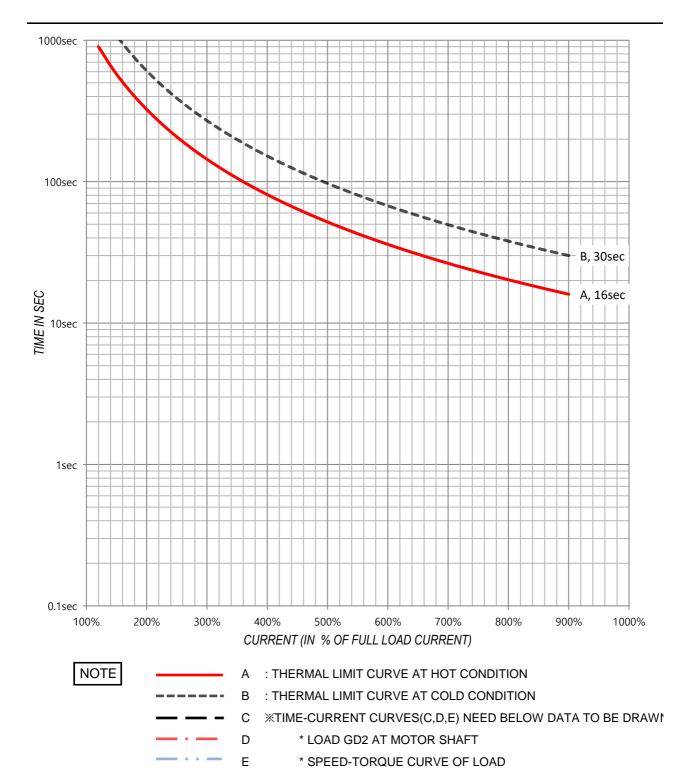


HYOSUNG HEAVY INDUSTRIES

LOAD - POWER FACTOR & EFFICIENCY CURVE

Curve No.

1PE_DSML21191M

OUTPUT	2.2	kW	POLES	4	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	1.2	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	270	%	LOCKED-ROTOR CURRENT	900	%
BREAKDOWN TORQUE	320	%	SPEED (at FULL LOAD)	1765	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	0.055	kg·m²

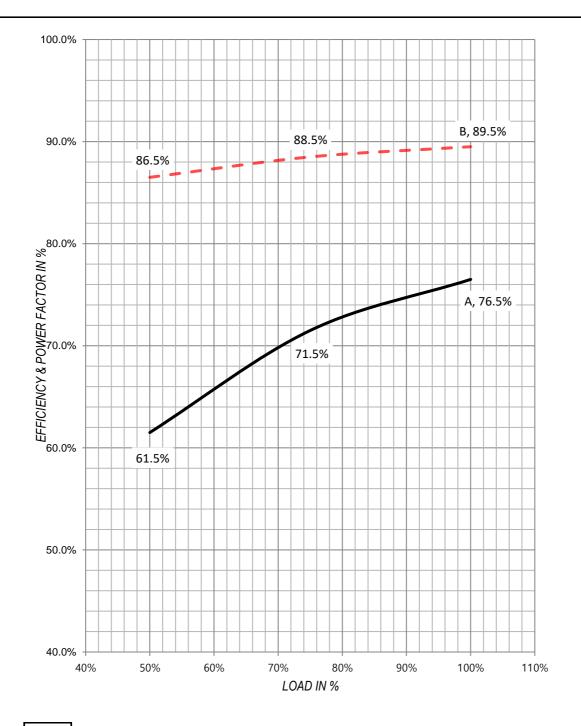

NOTE

A : LOAD - POWER FACTOR CURVE

B : LOAD - EFFICIENCY CURVE