

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	10HP 2P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	kW									
10	7.5	3505	230/460	60	215TC	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	kVA CODE	Class/Division Hazardous Location							
B	B	H	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
88.5	90.2	90.8	90.3	83.5	81	74.2

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
24.9/12.4	19.1/9.5	14.0/7.0	7.4/3.7	174.3/86.8	700

* Usable at 208V: 27.5 AMPS (FULL LOAD)

* Usable at 10HP 50Hz 380V 15.2A 2875R.P.M. S.F. 1.0 EFF. 87.9% (IE1)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
15	250	350	217	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
0.481	11	28	69	55	157

BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6208ZZ	6207ZZ	N/A	RIGID MOUNTING	NEMA


INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0013~10	180~3600	0.038~15	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	1~10	360~3600	15	
CONSTANT HP	60~90	10	3600~5400	15~10	

DRAWING NO.	ES1AS180506	REVISION	2.1
-------------	-------------	----------	-----


ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST

OUTPUT	10	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	15.0	lb-ft	FULL LOAD CURRENT	24.9/12.4	A
LOCKED ROTOR TORQUE	250	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	350	%	SPEED (at FULL LOAD)	3505	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.481	lb-ft ²

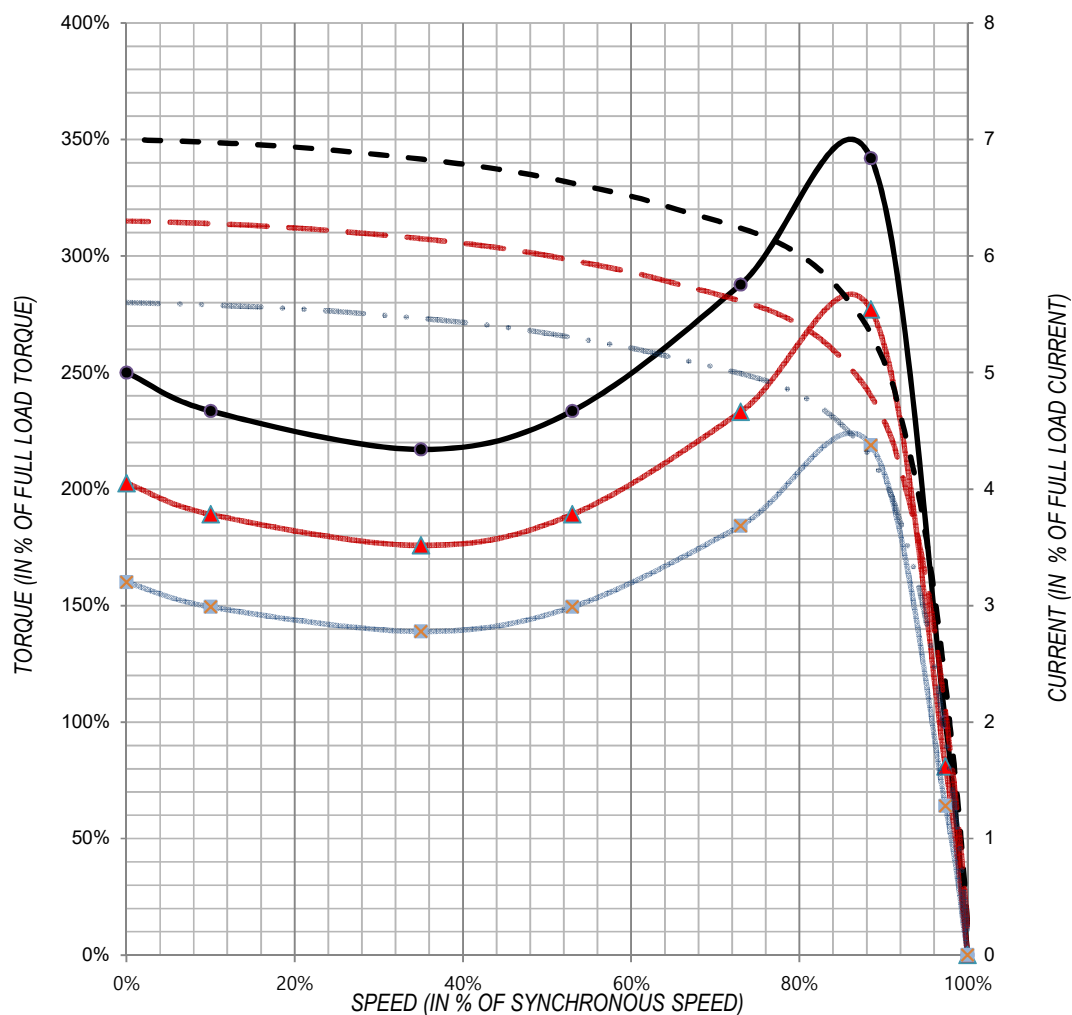


NOTE



- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL

OUTPUT	10	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	15.0	lb-ft	FULL LOAD CURRENT	24.9/12.4	A
LOCKED ROTOR TORQUE	250	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	350	%	SPEED (at FULL LOAD)	3505	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.481	lb-ft ²

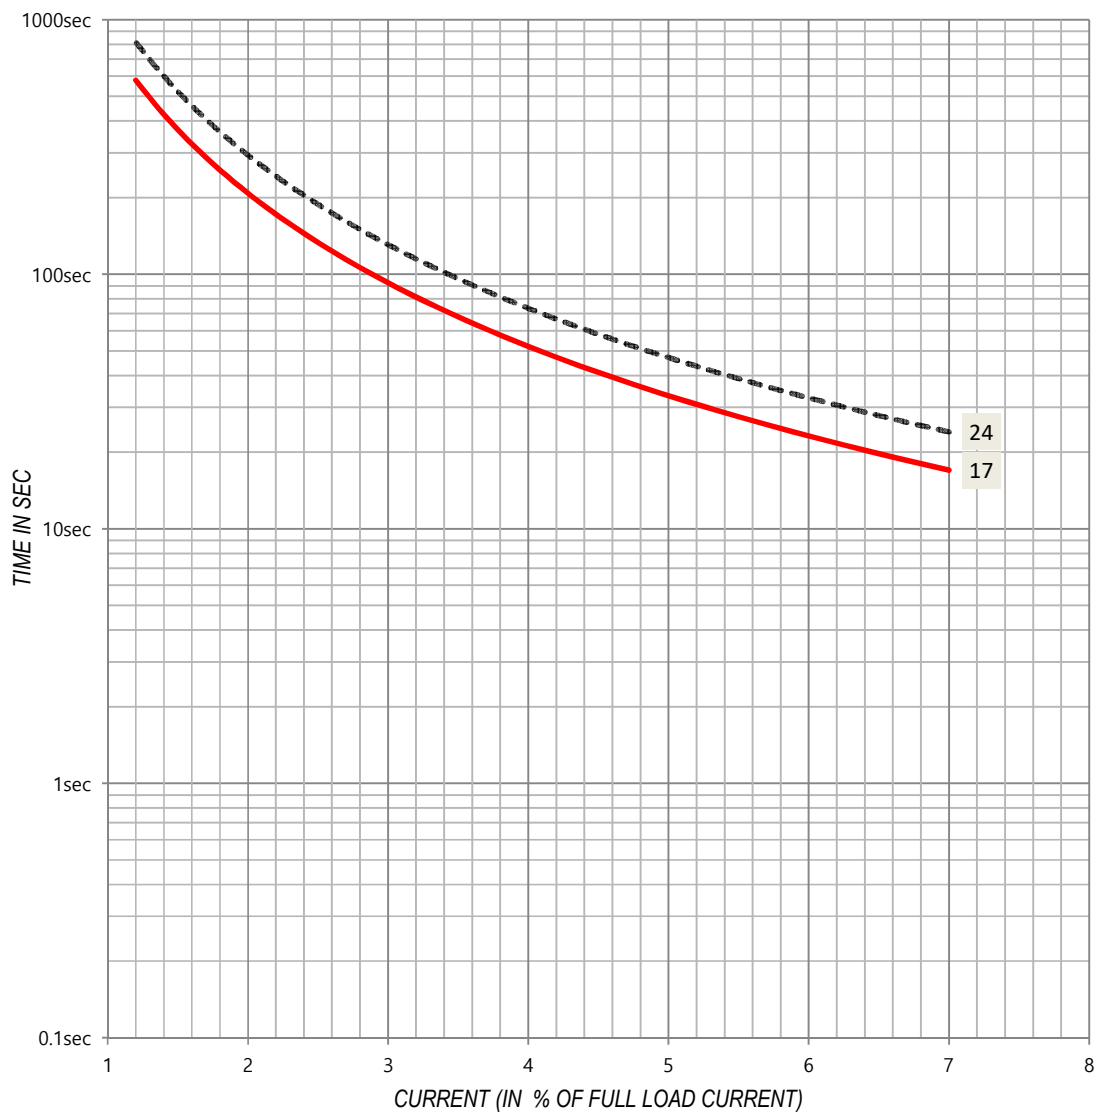


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- B : THERMAL LIMIT CURVE AT COLD CONDITION
- - - C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- - - - - D : * LOAD GD² AT MOTOR SHAFT
- - - - - E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE

OUTPUT	10	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	15.0	lb-ft	FULL LOAD CURRENT	24.9/12.4	A
LOCKED ROTOR TORQUE	250	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	350	%	SPEED (at FULL LOAD)	3505	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.481	lb-ft ²

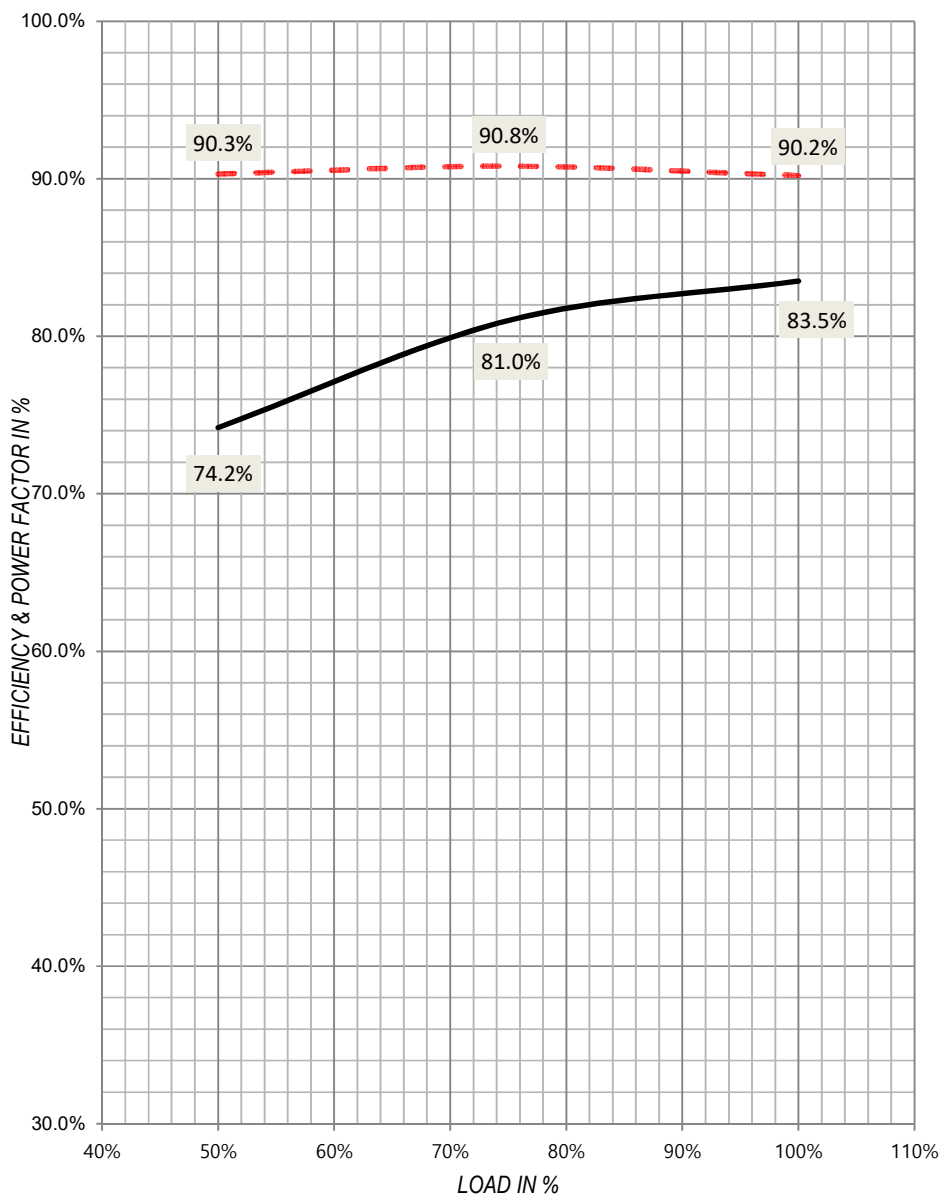

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE



HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

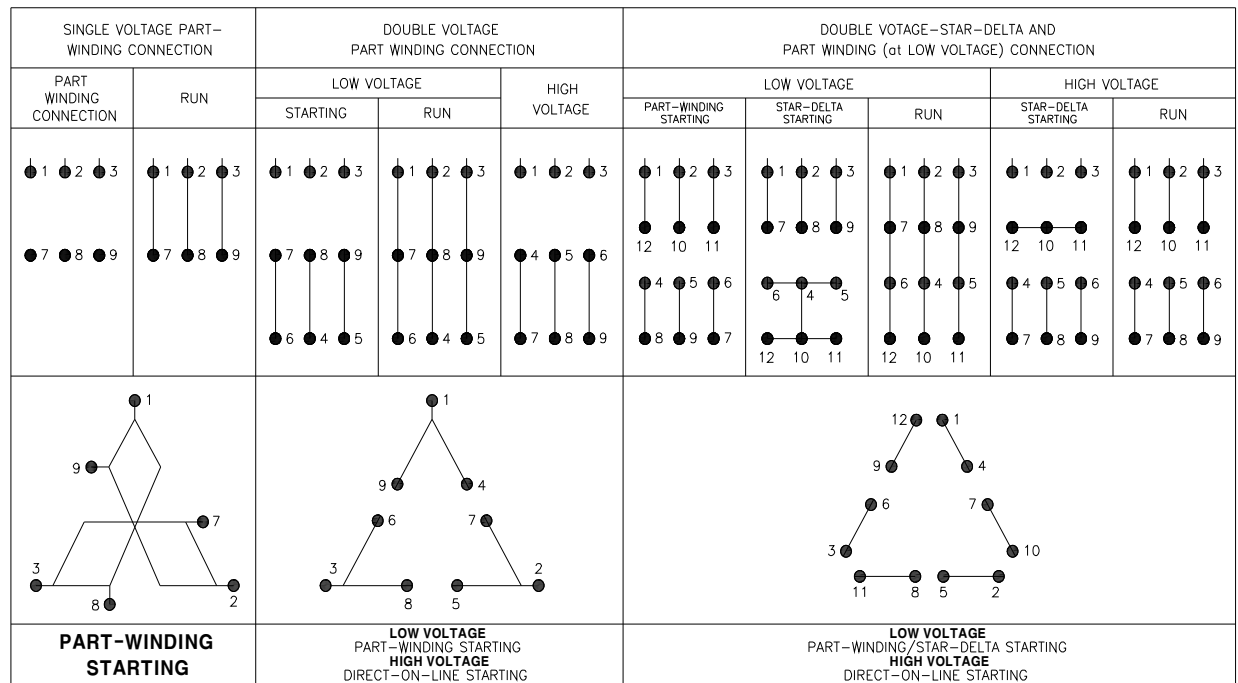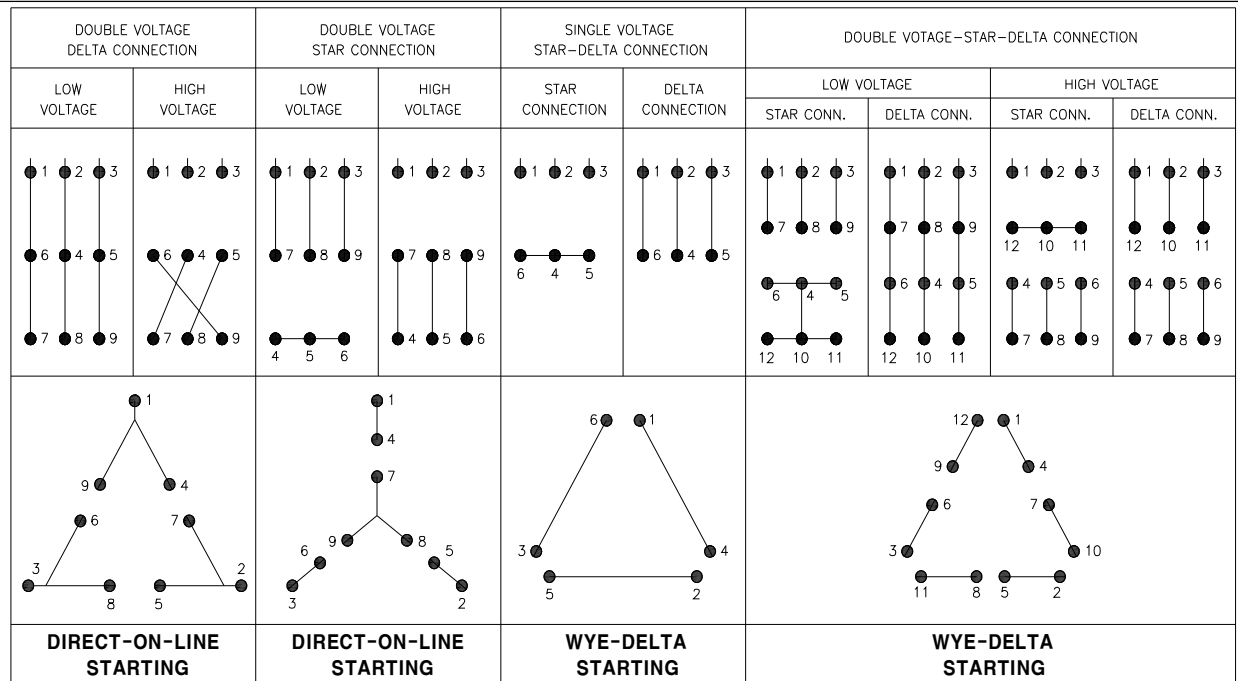

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.