

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	15HP 6P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
15	11	1180	230/460	60	284TD	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	kVA CODE	Class/Division Hazardous Location							
B	B	G	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
90.2	91.7	92	91.6	77.1	71.4	60.3

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
39.7/19.9	32.1/16.0	25.4/12.7	18.2/9.1	234.2/117.4	590

* Usable at 208V: 43.1 AMPS (FULL LOAD)

* Usable at 15HP 50Hz 380V 23.9A 970R.P.M. S.F. 1.0 EFF. 89.2% (IE2)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
66.8	175	216	148	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
6.906	200	572	69	55	379

BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6312ZZ	6310ZZ	N/A	RIGID MOUNTING	NEMA


INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0019~15	60~1200	0.167~66.8	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	1.5~15	120~1200	66.8	
CONSTANT HP	60~90	15	1200~1800	66.8~44.533	

DRAWING NO.	ES1AS185710	REVISION	2.1
-------------	-------------	----------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST

OUTPUT	15	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	66.8	lb-ft	FULL LOAD CURRENT	39.7/19.9	A
LOCKED ROTOR TORQUE	175	%	LOCKED-ROTOR CURRENT	590	%
BREAKDOWN TORQUE	216	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	6.906	lb-ft ²

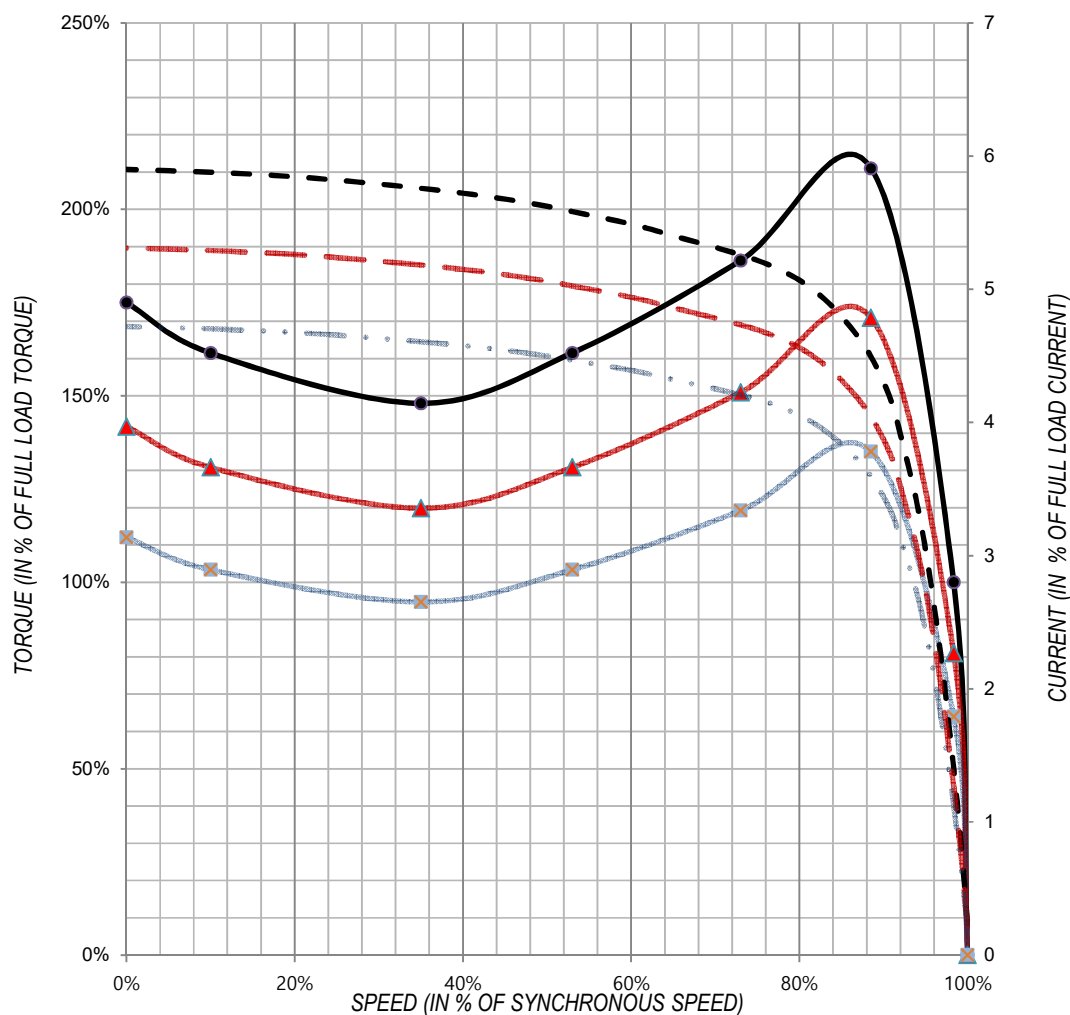


NOTE

	A : SPEED-TORQUE CURVE AT	100% RATED VOLTAGE
	B : SPEED-TORQUE CURVE AT	90% RATED VOLTAGE
	C : SPEED-TORQUE CURVE AT	80% RATED VOLTAGE
	D : SPEED-CURRENT CURVE AT	100% RATED VOLTAGE
	E : SPEED-CURRENT CURVE AT	90% RATED VOLTAGE
	F : SPEED-CURRENT CURVE AT	80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL

OUTPUT	15	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	66.8	lb-ft	FULL LOAD CURRENT	39.7/19.9	A
LOCKED ROTOR TORQUE	175	%	LOCKED-ROTOR CURRENT	590	%
BREAKDOWN TORQUE	216	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	6.906	lb-ft ²

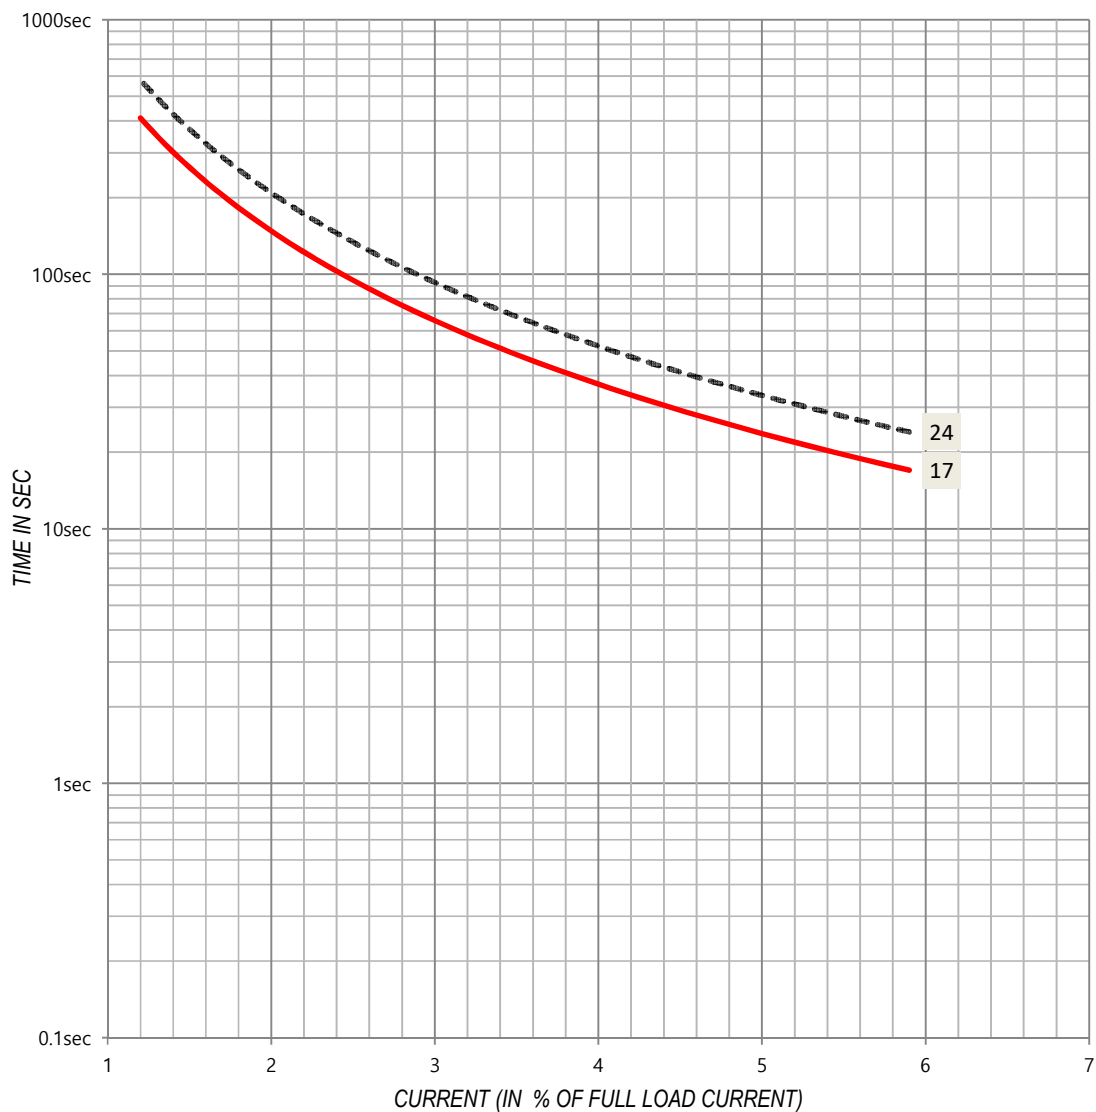


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- - - - - B : THERMAL LIMIT CURVE AT COLD CONDITION
- - - - - C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- - - - - D : * LOAD GD2 AT MOTOR SHAFT
- - - - - E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE

OUTPUT	15	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	66.8	lb-ft	FULL LOAD CURRENT	39.7/19.9	A
LOCKED ROTOR TORQUE	175	%	LOCKED-ROTOR CURRENT	590	%
BREAKDOWN TORQUE	216	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	6.906	lb-ft ²

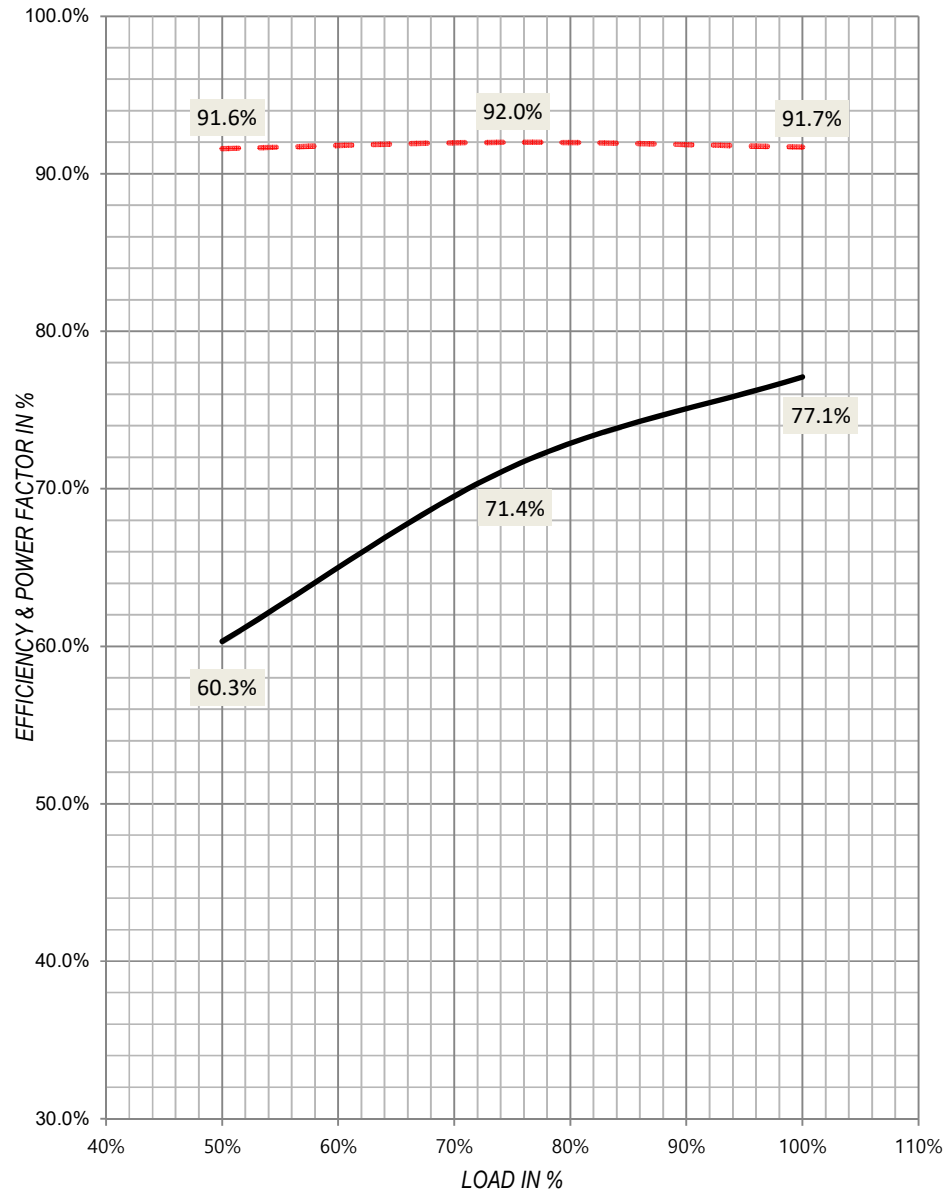

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOTAGE - STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART- WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION			DOUBLE VOTAGE - STAR-DELTA AND PART WINDING (ot LOW VOLTAGE) CONNECTION				
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE	
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING				

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.