

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	15HP 6P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
15	11	1180	575	60	284TC	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	kVA CODE	Class/Division Hazardous Location							
B	B	G	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
90.2	91.7	92	91.6	77.1	71.4	60.3

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
15.9	12.8	10.2	7.6	93.8	590

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
66.8	175	216	148	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
6.906	200	572	69	55	370

BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6312ZZ	6310ZZ	N/A	RIGID MOUNTING	NEMA


INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0019~15	60~1200	0.167~66.8	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	1.5~15	120~1200	66.8	
CONSTANT HP	60~90	15	1200~1800	66.8~44.533	

DRAWING NO.	ES1AS180510	REVISION	0.1
-------------	-------------	----------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST

OUTPUT	15	HP	POLES	6	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	66.8	lb-ft	FULL LOAD CURRENT	15.9	A
LOCKED ROTOR TORQUE	175	%	LOCKED-ROTOR CURRENT	590	%
BREAKDOWN TORQUE	216	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	6.906	lb-ft ²

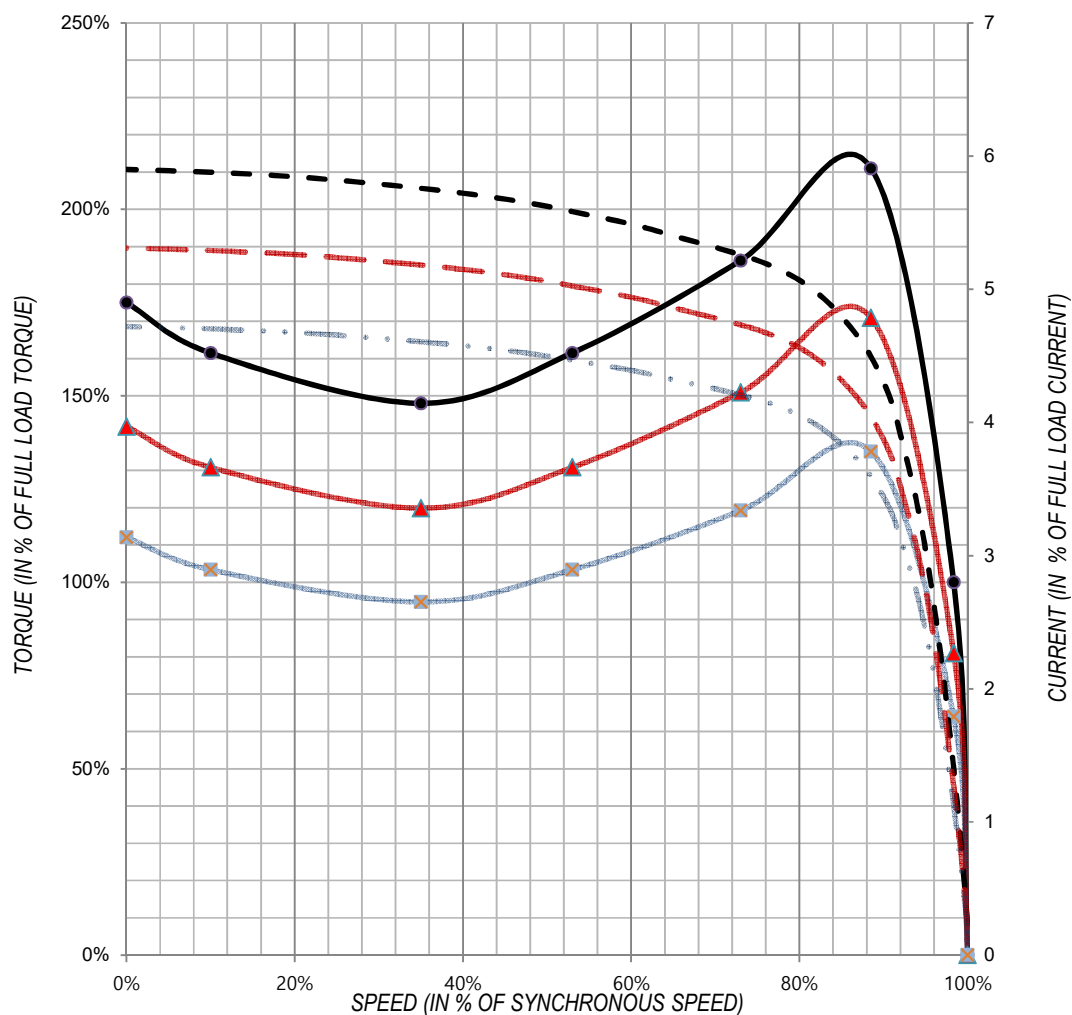


NOTE

- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- - -▲- - - B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- ...■... C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- - - D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- - - E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- ... F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL


OUTPUT	15	HP	POLES	6	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	66.8	lb-ft	FULL LOAD CURRENT	15.9	A
LOCKED ROTOR TORQUE	175	%	LOCKED-ROTOR CURRENT	590	%
BREAKDOWN TORQUE	216	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb·ft ²	GD ² of MOTOR	6.906	lb·ft ²

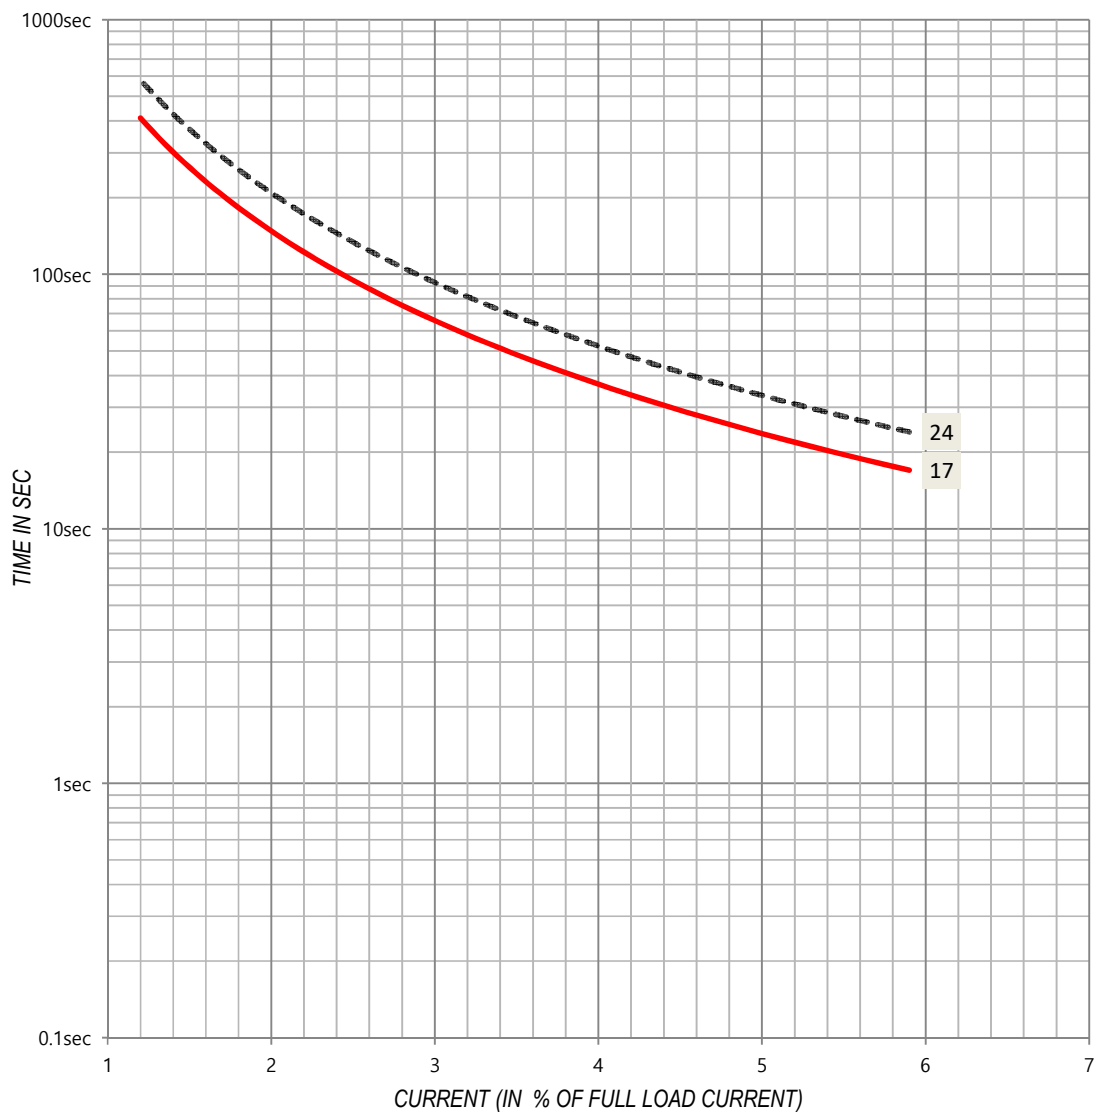

NOTE	—————	A : THERMAL LIMIT CURVE AT HOT CONDITION
	- - - - -	B : THERMAL LIMIT CURVE AT COLD CONDITION
	- - - - -	C : ✕TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
	- - - - -	D : * LOAD GD2 AT MOTOR SHAFT
	- - - - -	E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE

OUTPUT	15	HP	POLES	6	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	66.8	lb-ft	FULL LOAD CURRENT	15.9	A
LOCKED ROTOR TORQUE	175	%	LOCKED-ROTOR CURRENT	590	%
BREAKDOWN TORQUE	216	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	6.906	lb-ft ²

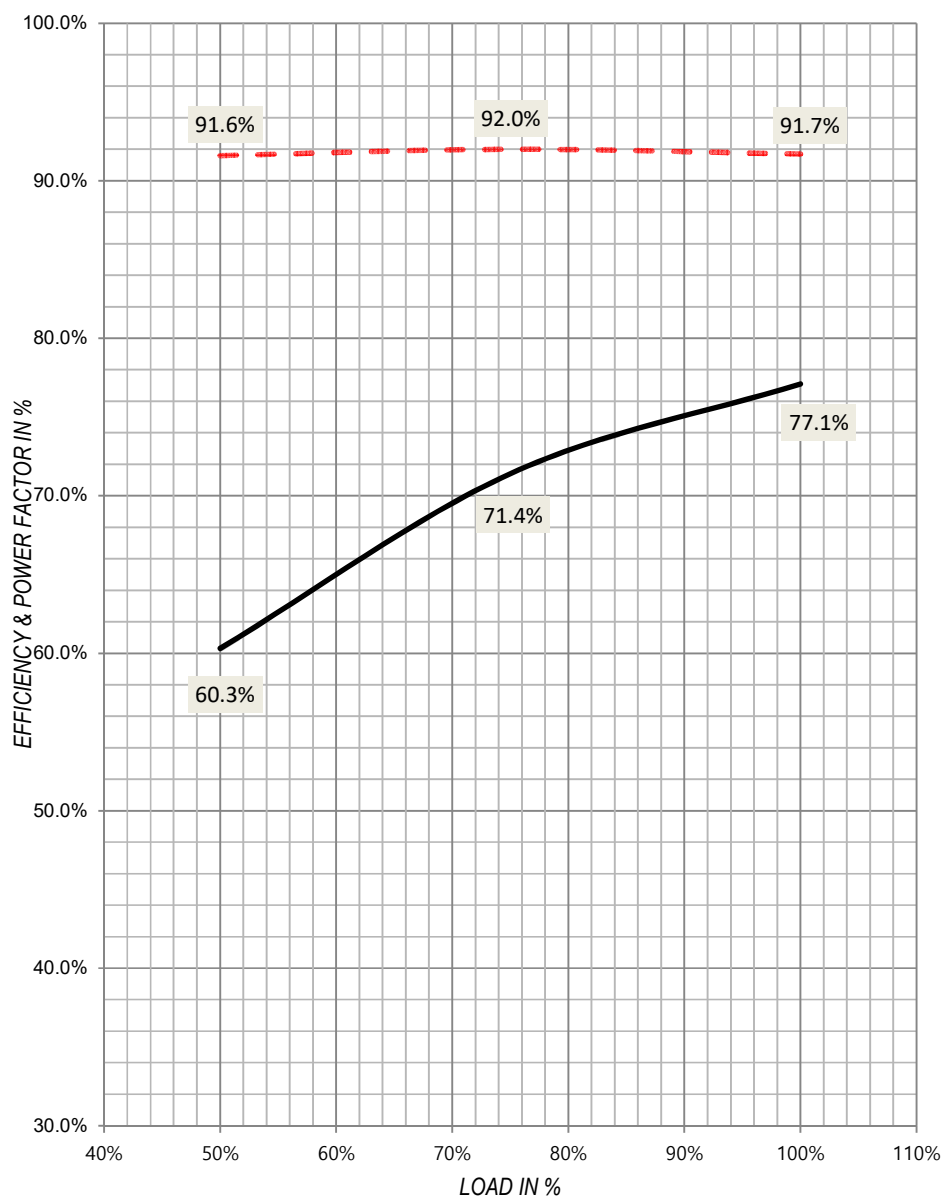

NOTE

— A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOTAGE -STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART-WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION		DOUBLE VOTAGE -STAR-DELTA AND PART WINDING (ot LOW VOLTAGE) CONNECTION					
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE	
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING				
		HIGH VOLTAGE DIRECT-ON-LINE STARTING			HIGH VOLTAGE DIRECT-ON-LINE STARTING				

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.