

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	20HP 6P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
20	15	1180	230/460	60	286TD	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	kVA CODE	Class/Division Hazardous Location							
B	B	G	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
90.2	91.7	92.2	91.9	76.8	71.5	60.4

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
53.2/26.6	42.6/21.3	33.7/16.9	23.8/11.9	297.9/149	560

* Usable at 208V: 57.7 AMPS (FULL LOAD)

* Usable at 20HP 50Hz 380V 32A 970R.P.M. S.F. 1.0 EFF. 89.5% (IE1)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
89.1	160	205	135	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
8.940	262	615	69	55	466

BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6312ZZ	6310ZZ	N/A	RIGID MOUNTING	NEMA


INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0025~20	60~1200	0.223~89.1	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	2~20	120~1200	89.1	
CONSTANT HP	60~90	20	1200~1800	89.1~59.4	

DRAWING NO.	ES1AS185712	REVISION	2.1
-------------	-------------	----------	-----


ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.
					1ST

OUTPUT	20	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	89.1	lb-ft	FULL LOAD CURRENT	53.2/26.6	A
LOCKED ROTOR TORQUE	160	%	LOCKED-ROTOR CURRENT	560	%
BREAKDOWN TORQUE	205	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	8.94	lb-ft ²

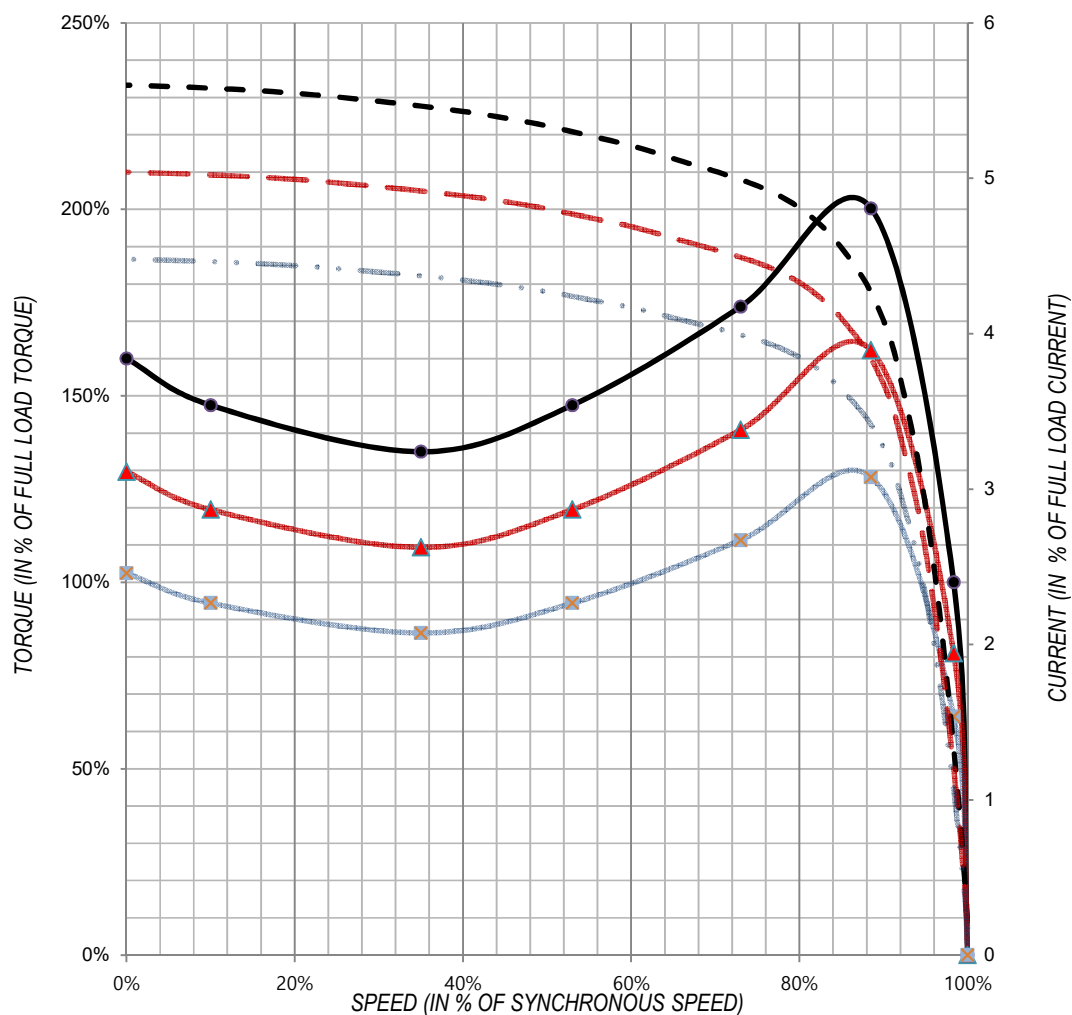


NOTE



- | | | |
|-----|------------------------|--------------------|
| A : | SPEED-TORQUE CURVE AT | 100% RATED VOLTAGE |
| B : | SPEED-TORQUE CURVE AT | 90% RATED VOLTAGE |
| C : | SPEED-TORQUE CURVE AT | 80% RATED VOLTAGE |
| D : | SPEED-CURRENT CURVE AT | 100% RATED VOLTAGE |
| E : | SPEED-CURRENT CURVE AT | 90% RATED VOLTAGE |
| F : | SPEED-CURRENT CURVE AT | 80% RATED VOLTAGE |

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL


OUTPUT	20	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	89.1	lb-ft	FULL LOAD CURRENT	53.2/26.6	A
LOCKED ROTOR TORQUE	160	%	LOCKED-ROTOR CURRENT	560	%
BREAKDOWN TORQUE	205	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb·ft ²	GD ² of MOTOR	8.94	lb·ft ²

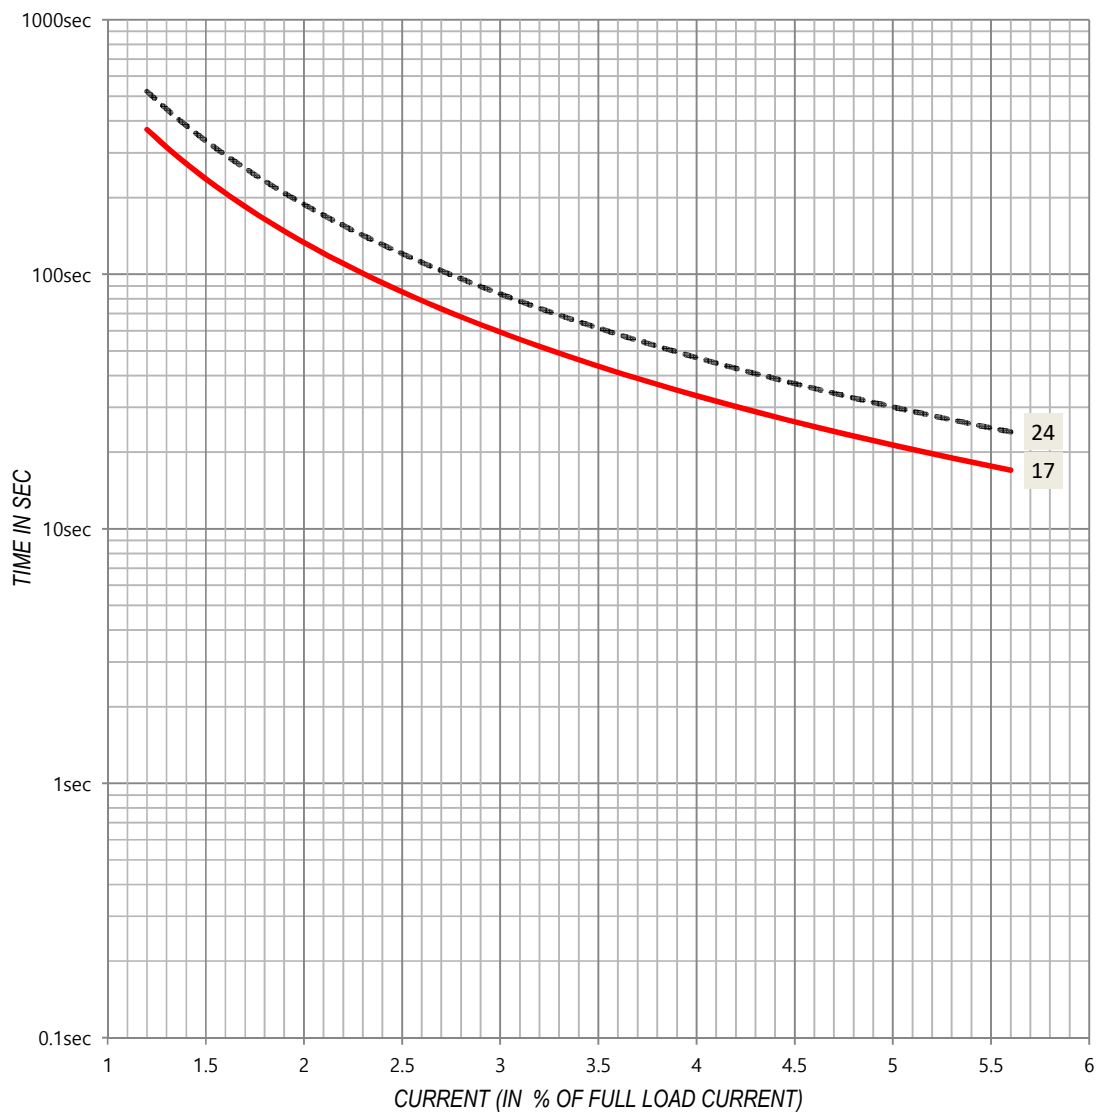

NOTE	—————	A : THERMAL LIMIT CURVE AT HOT CONDITION
	- - - - -	B : THERMAL LIMIT CURVE AT COLD CONDITION
	- · - · -	C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
	~~~~~	D : * LOAD GD2 AT MOTOR SHAFT
	~~~~~	E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE

OUTPUT	20	HP	POLES	6	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	89.1	lb-ft	FULL LOAD CURRENT	53.2/26.6	A
LOCKED ROTOR TORQUE	160	%	LOCKED-ROTOR CURRENT	560	%
BREAKDOWN TORQUE	205	%	SPEED (at FULL LOAD)	1180	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	8.94	lb-ft ²

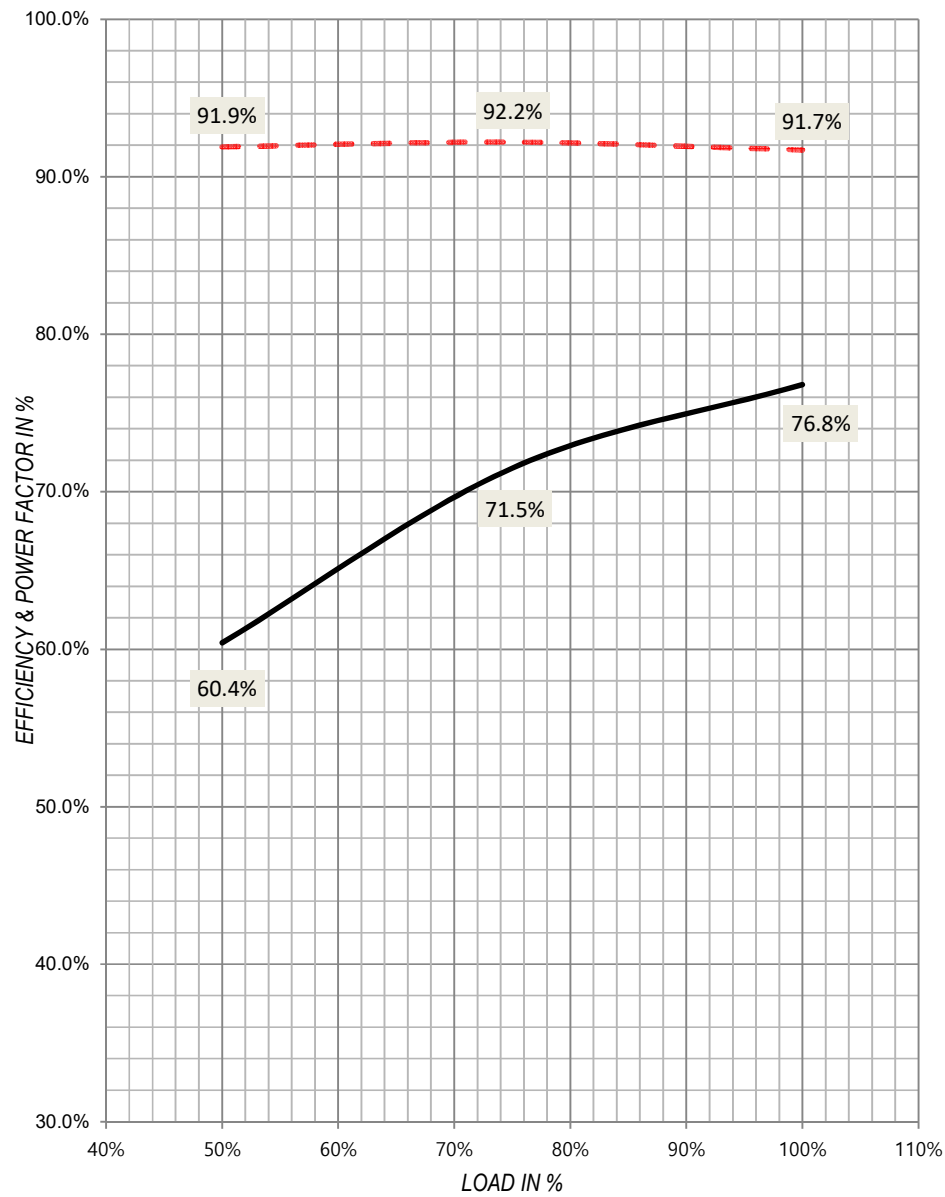

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024



ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.