

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	2HP 2P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
2	1.5	3480	230/460	60	145TD	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	kVA CODE	Class/Division Hazardous Location							
B	B	K	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
82.5	85.5	85.5	83.8	88.8	82.4	70.1

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
4.9/2.5	4.0/2.0	3.2/1.6	1.8/0.9	42.6/21.8	870

* Usable at 208V: 5.4 AMPS (FULL LOAD)

* Usable at 2HP 50Hz 380V 3A 2840R.P.M. S.F. 1.0 EFF. 82.9% (IE2)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
3	290	338	255	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
0.077	2	8	67	55	66

BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6205ZZ	6204ZZ	N/A	RIGID MOUNTING	NEMA


INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0003~2	180~3600	0.008~3	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	0.2~2	360~3600	3	
CONSTANT HP	60~90	2	3600~5400	3~2	

DRAWING NO.	ES1AS185702	REVISION	2.1
-------------	-------------	----------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE		Curve No.	
			1ST	

OUTPUT	2	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	3.0	lb-ft	FULL LOAD CURRENT	4.9/2.5	A
LOCKED ROTOR TORQUE	290	%	LOCKED-ROTOR CURRENT	870	%
BREAKDOWN TORQUE	338	%	SPEED (at FULL LOAD)	3480	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.077	lb-ft ²

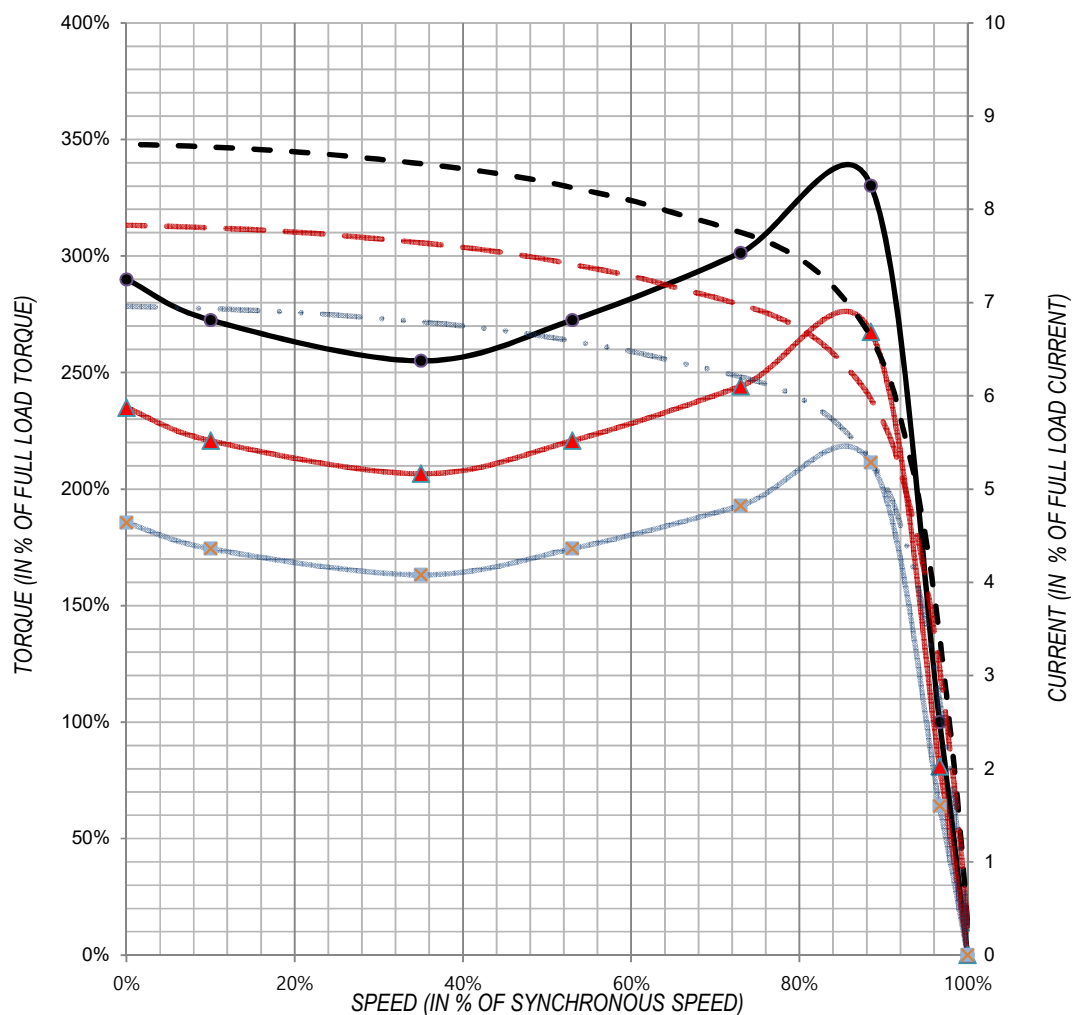


NOTE

—●—	A : SPEED-TORQUE CURVE AT	100% RATED VOLTAGE
- - -▲- - -	B : SPEED-TORQUE CURVE AT	90% RATED VOLTAGE
...■...	C : SPEED-TORQUE CURVE AT	80% RATED VOLTAGE
- - -	D : SPEED-CURRENT CURVE AT	100% RATED VOLTAGE
- - -▲- - -	E : SPEED-CURRENT CURVE AT	90% RATED VOLTAGE
...■...	F : SPEED-CURRENT CURVE AT	80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL

OUTPUT	2	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	3.0	lb-ft	FULL LOAD CURRENT	4.9/2.5	A
LOCKED ROTOR TORQUE	290	%	LOCKED-ROTOR CURRENT	870	%
BREAKDOWN TORQUE	338	%	SPEED (at FULL LOAD)	3480	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.077	lb-ft ²

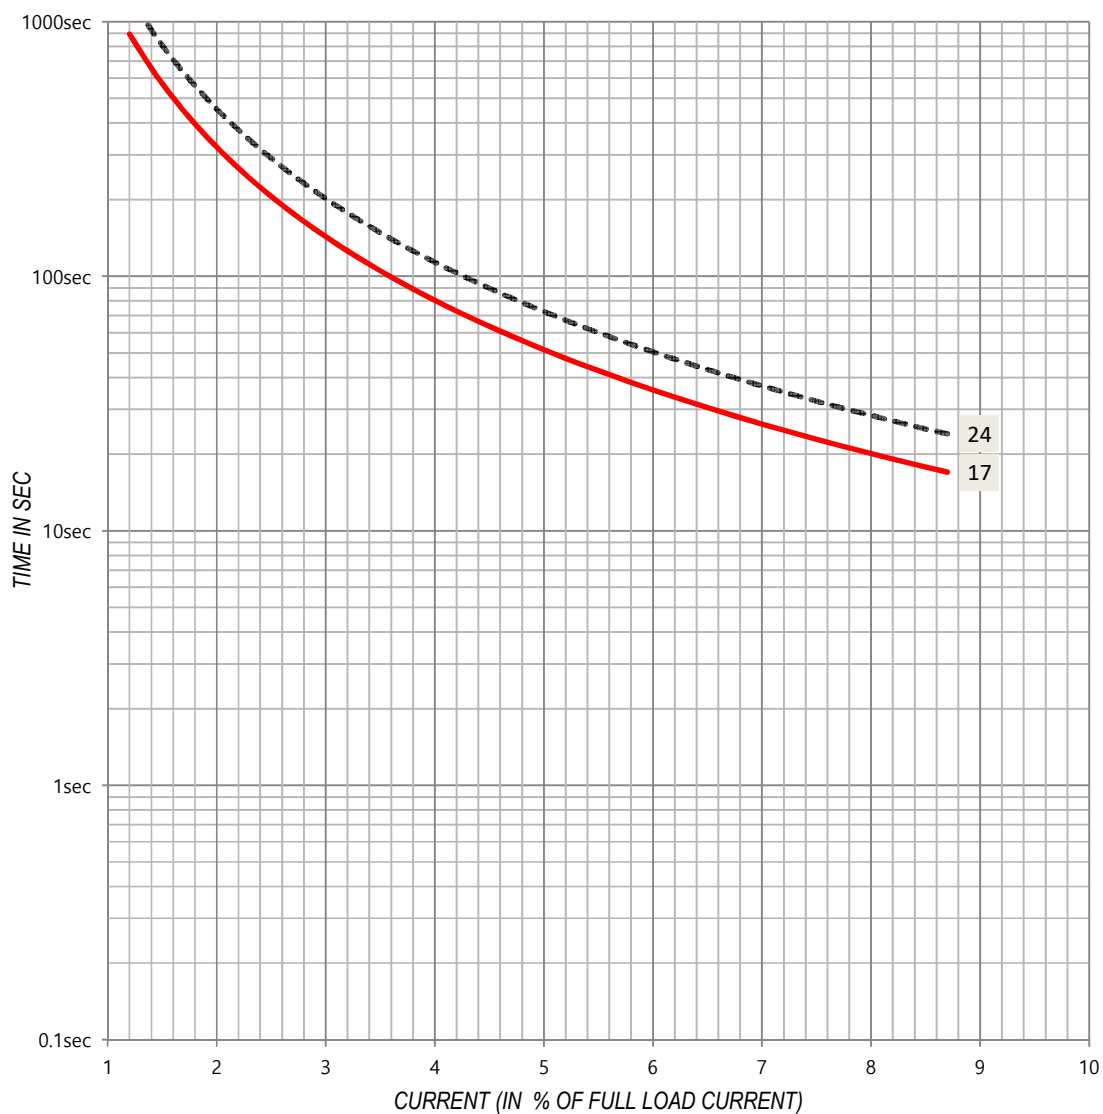


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- B : THERMAL LIMIT CURVE AT COLD CONDITION
- - - C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- ⋈ D : * LOAD GD² AT MOTOR SHAFT
- ⋈ E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE

OUTPUT	2	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	3.0	lb-ft	FULL LOAD CURRENT	4.9/2.5	A
LOCKED ROTOR TORQUE	290	%	LOCKED-ROTOR CURRENT	870	%
BREAKDOWN TORQUE	338	%	SPEED (at FULL LOAD)	3480	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	0.077	lb-ft ²

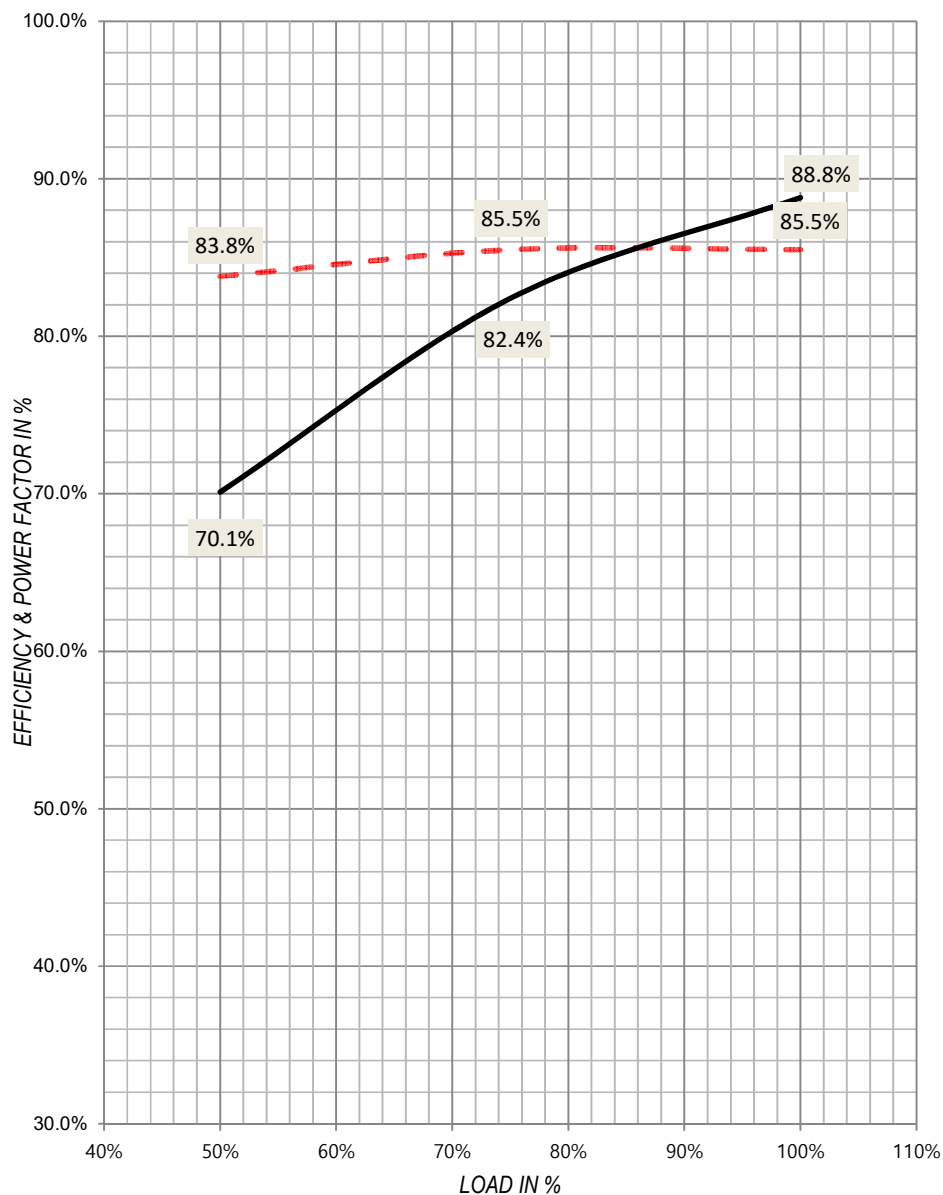

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOTAGE - STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART- WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION			DOUBLE VOTAGE - STAR-DELTA AND PART WINDING (ot LOW VOLTAGE) CONNECTION				
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE	
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING				

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.