

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	30HP 2P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
30	22	3555	230/460	60	286TSC	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	kVA CODE	Class/Division Hazardous Location							
B	B	G	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
90.2	91.7	91.7	90.6	85.7	83.4	76.9

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
71.5/35.7	55.1/27.5	40.3/20.2	21.0/10.5	464.8/232.1	650

* Usable at 208V: 78.8 AMPS (FULL LOAD)

* Usable at 30HP 50Hz 380V 43.3A 2940R.P.M. S.F. 1.0 EFF. 90.6% (IE1)

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
44.4	170	220	131	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
2.901	30	85	75	55	431

BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6312ZZ	6310ZZ	N/A	RIGID MOUNTING	NEMA


INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0038~30	180~3600	0.111~44.4	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	3~30	360~3600	44.4	
CONSTANT HP	60~90	30	3600~5400	44.4~29.6	

DRAWING NO.	ES1AS180511	REVISION	2.1
-------------	-------------	----------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE		Curve No.	
			1ST	

OUTPUT	30	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	44.4	lb-ft	FULL LOAD CURRENT	71.5/35.7	A
LOCKED ROTOR TORQUE	170	%	LOCKED-ROTOR CURRENT	650	%
BREAKDOWN TORQUE	220	%	SPEED (at FULL LOAD)	3555	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	2.901	lb-ft ²

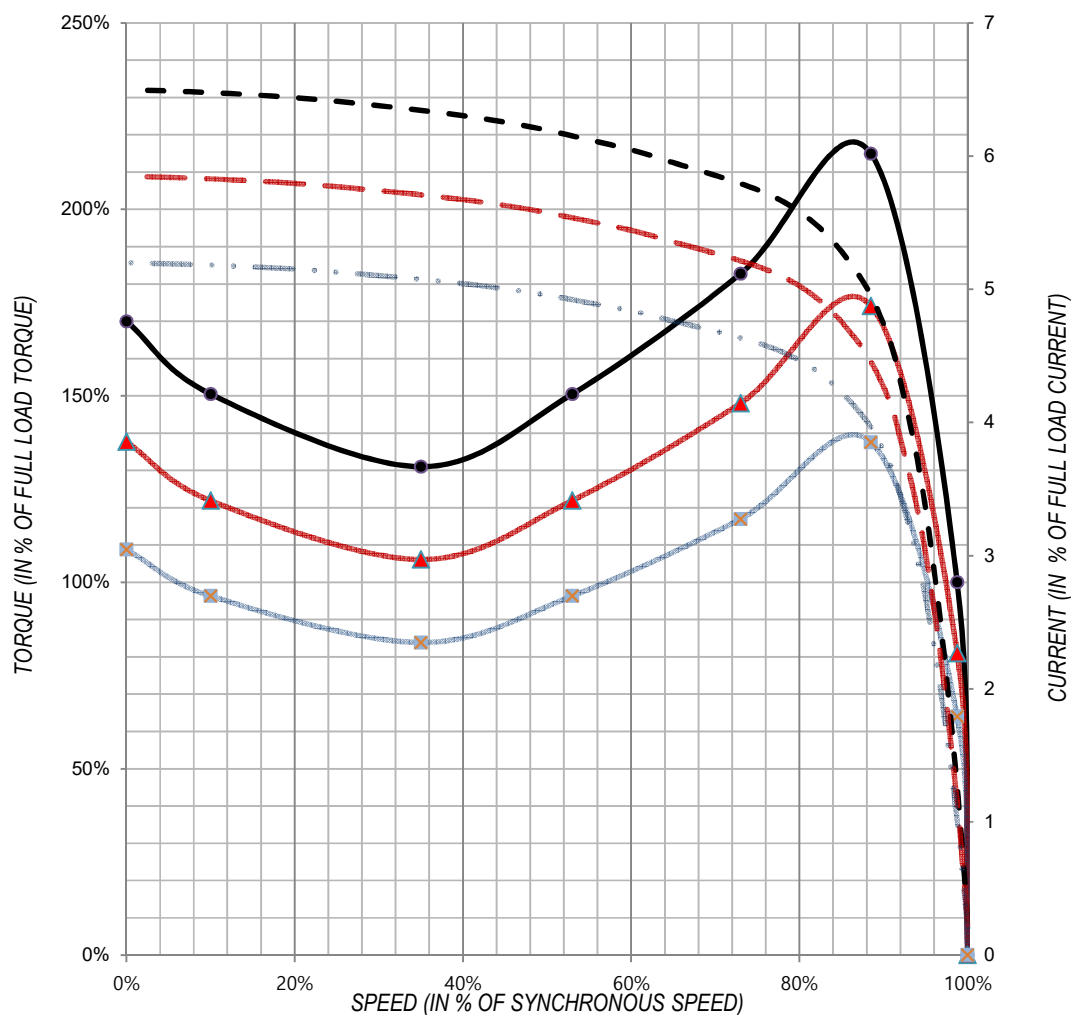


NOTE

	A : SPEED-TORQUE CURVE AT	100% RATED VOLTAGE
	B : SPEED-TORQUE CURVE AT	90% RATED VOLTAGE
	C : SPEED-TORQUE CURVE AT	80% RATED VOLTAGE
	D : SPEED-CURRENT CURVE AT	100% RATED VOLTAGE
	E : SPEED-CURRENT CURVE AT	90% RATED VOLTAGE
	F : SPEED-CURRENT CURVE AT	80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL

OUTPUT	30	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	44.4	lb-ft	FULL LOAD CURRENT	71.5/35.7	A
LOCKED ROTOR TORQUE	170	%	LOCKED-ROTOR CURRENT	650	%
BREAKDOWN TORQUE	220	%	SPEED (at FULL LOAD)	3555	RPM
GD ² of LOAD :	-	lb·ft ²	GD ² of MOTOR	2.901	lb·ft ²

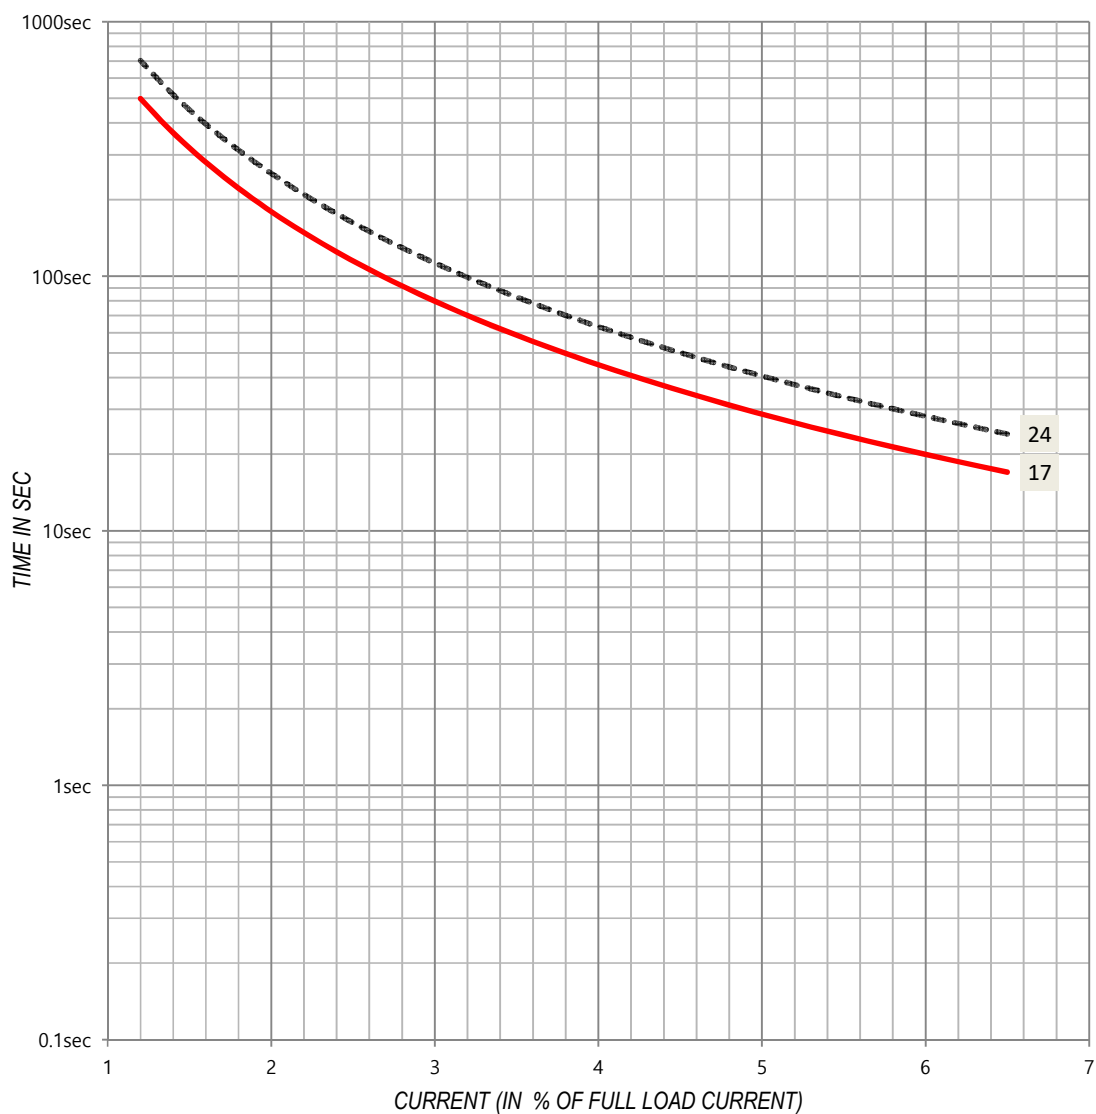


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- B : THERMAL LIMIT CURVE AT COLD CONDITION
- C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- D : * LOAD GD2 AT MOTOR SHAFT
- E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE

OUTPUT	30	HP	POLES	2	P
VOLTAGE	230/460	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	44.4	lb-ft	FULL LOAD CURRENT	71.5/35.7	A
LOCKED ROTOR TORQUE	170	%	LOCKED-ROTOR CURRENT	650	%
BREAKDOWN TORQUE	220	%	SPEED (at FULL LOAD)	3555	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	2.901	lb-ft ²

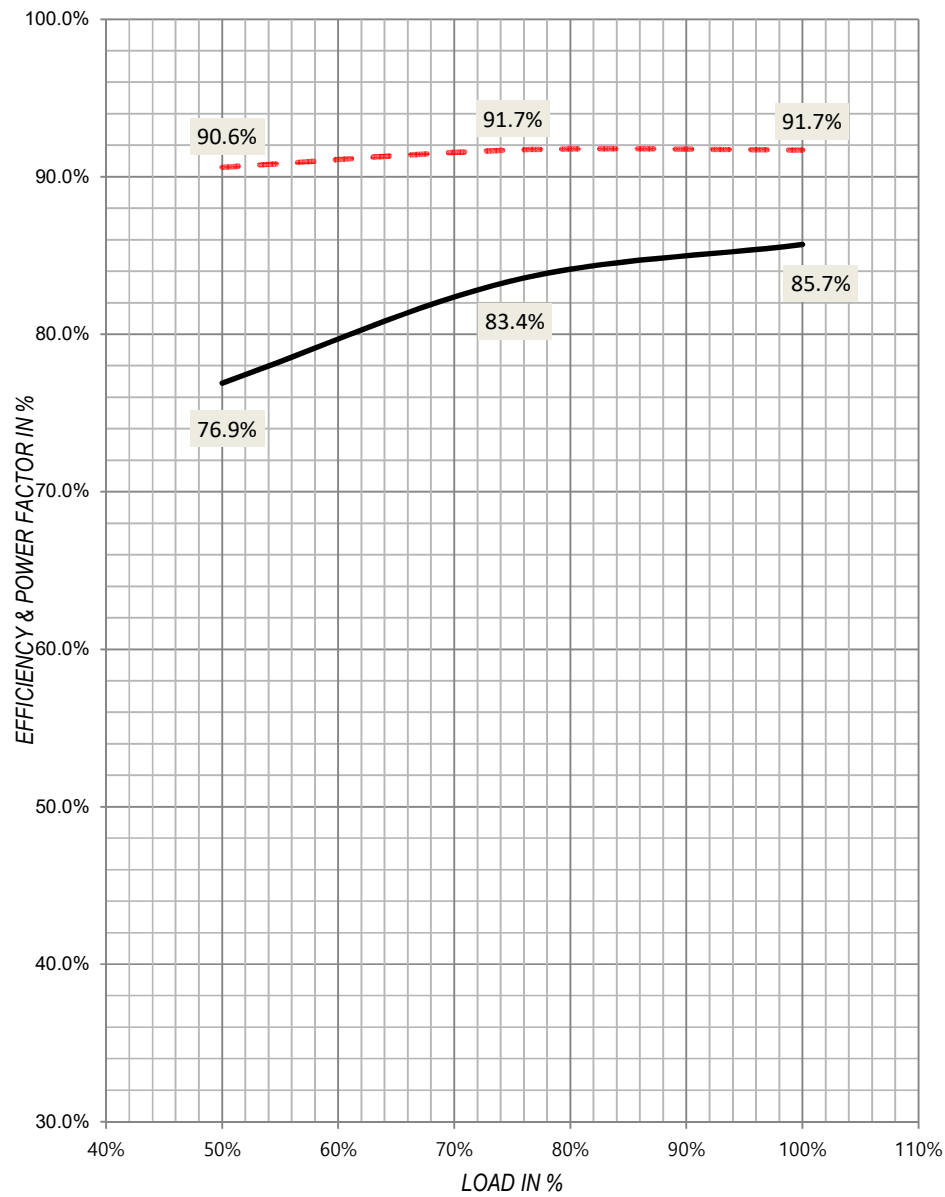

NOTE

- A : LOAD - POWER FACTOR CURVE
- - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOTAGE - STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART- WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION			DOUBLE VOTAGE - STAR-DELTA AND PART WINDING (ot LOW VOLTAGE) CONNECTION				
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE	
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING				

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.