

HICO 3 PHASE INDUCTION MOTOR	PERFORMANCE DATASHEET	ISSUED	01/15/2026
		MODEL	5HP 6P

NAMEPLATE INFORMATION										
OUTPUT		RPM	VOLTS	Hz	FRAME SIZE	ENCLOSURE TYPE	S.F.	INS. CALSS	RATING	AMB. TEMP.
HP	KW									
5	3.7	1175	575	60	215T	TEFC	1.25	F	CONT.	40°C
TEMP. RISE	NEMA DESIGN	KVA CODE	Class/Division Hazardous Location							
B	B	J	Class I, Division 2, Group B, C & D							

TYPICAL PERFORMANCE DATA						
EFFICIENCY (%)				POWER FACTOR (%)		
FULL LOAD		3/4 LOAD	1/2 LOAD	FULL LOAD	3/4 LOAD	1/2 LOAD
MIN.	NOM.					
87.5	89.5	89.9	89.1	73.5	66.8	54.7

CURRENT					
FULL LOAD AMPS	3/4 LOAD AMPS	1/2 LOAD AMPS	NO LOAD AMPS	STARTING CURRENT AMPS	STARTING CURRENT % FLC
5.7	4.7	3.8	2.8	39.9	700

TORQUE				ALLOWABLE STARTS PER HOUR	
FULL LOAD (lb-ft)	LOCKED ROTOR % FLT	BREAK DOWN % FLT	PULL UP % FLT	COLD	HOT
22.4	180	227	147	2	1

MECHANICAL DATA					
INERTIA			SOUND PRESSURE LEVEL @ 3 ft (dB(A))	PROTECTION GRADE	WEIGHT (Lbs)
ROTOR WR ² (lb-ft ²)	NEMA LOAD WK ² (lb-ft ²)	MAX ALLOWABLE WK ² (lb-ft ²)			
1.756	71	113	68	55	162


BEARING		GREASE	MOUNTING	
DE	ODE		TYPE OF CONSTRUCTION	TERMINAL BOX DESIGN
6208ZZ	6207ZZ	N/A	RIGID MOUNTING	NEMA

INVERTER DUTY DATA					
TYPE	HZ	HP	RPM	TORQUE(LB-FT)	NOTE
VARIABLE TORQUE	3~60	0.0006~5	60~1200	0.056~22.4	WITH TEMP. RISE CLASS F & S.F. 1.0
CONSTANT TORQUE	6~60	0.5~5	120~1200	22.4	
CONSTANT HP	60~90	5	1200~1800	22.4~14.933	

DRAWING NO.	ES1AS180406	REVISION	0.1
-------------	-------------	----------	-----

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.


HICO 3 PHASE INDUCTION MOTOR	SPEED - TORQUE & CURRENT CURVE				Curve No.	
					1ST	
OUTPUT	5	HP	POLES	6	P	
VOLTAGE	575	V	FREQUENCY	60	Hz	
FULL LOAD TORQUE	22.4	lb-ft	FULL LOAD CURRENT	5.7	A	
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	700	%	
BREAKDOWN TORQUE	227	%	SPEED (at FULL LOAD)	1175	RPM	
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	1.756	lb-ft ²	

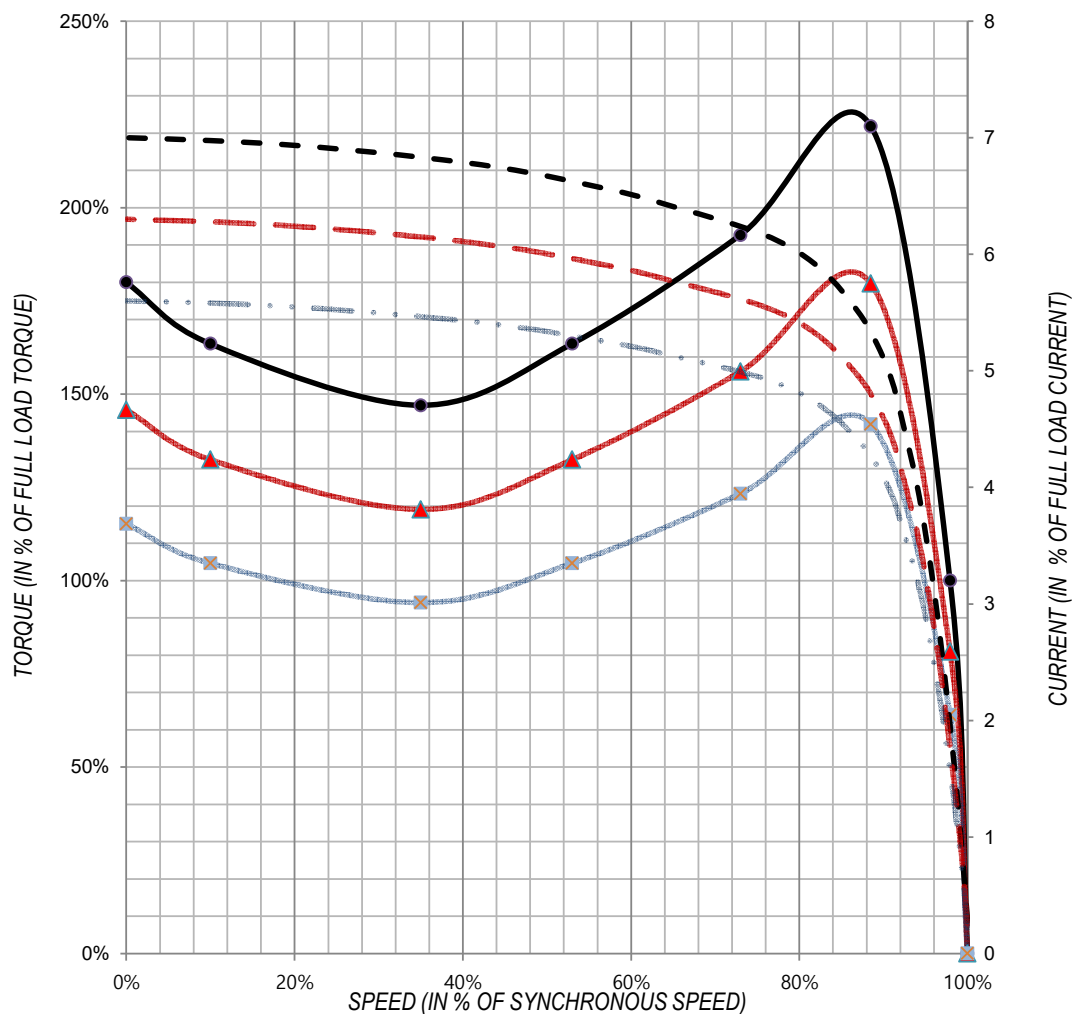

NOTE


- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

HICO 3 PHASE INDUCTION MOTOR	THERMAL LIMIT & TIME - CURRENT CURVE				Curve No.
					1TL
OUTPUT	5	HP	POLES	6	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	22.4	lb-ft	FULL LOAD CURRENT	5.7	A
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	227	%	SPEED (at FULL LOAD)	1175	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	1.756	lb-ft ²

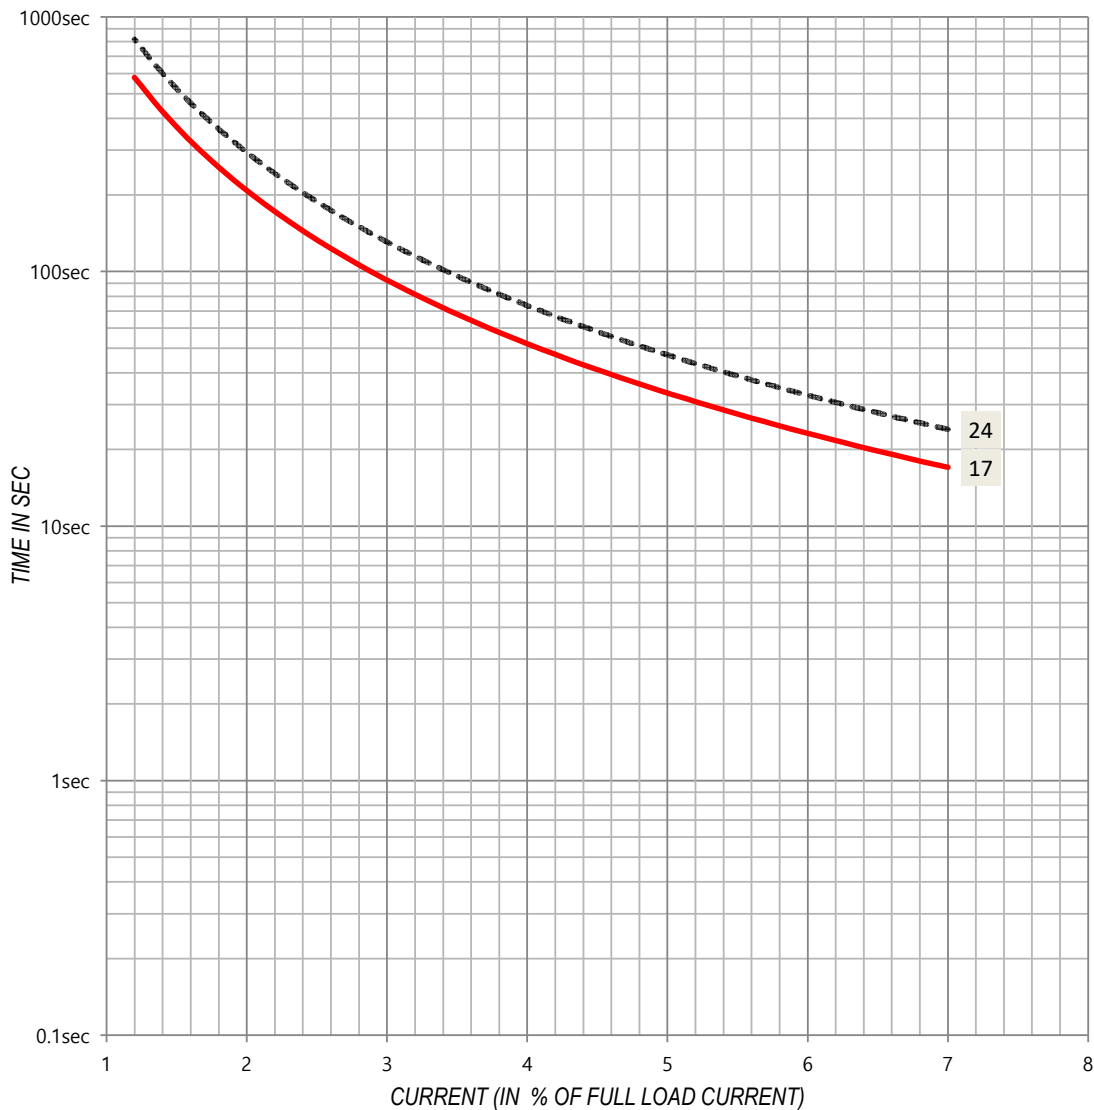

- NOTE
- A : THERMAL LIMIT CURVE AT HOT CONDITION
 - - - - - B : THERMAL LIMIT CURVE AT COLD CONDITION
 - — — — — C : ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
 - . - . - . D : * LOAD GD2 AT MOTOR SHAFT
 - . - . - . E : * SPEED-TORQUE CURVE OF LOAD

HICO 3 PHASE INDUCTION MOTOR	LOAD - POWER FACTOR & EFFICIENCY CURVE				Curve No.
					1PE
OUTPUT	5	HP	POLES	6	P
VOLTAGE	575	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	22.4	lb-ft	FULL LOAD CURRENT	5.7	A
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	700	%
BREAKDOWN TORQUE	227	%	SPEED (at FULL LOAD)	1175	RPM
GD ² of LOAD :	-	lb-ft ²	GD ² of MOTOR	1.756	lb-ft ²

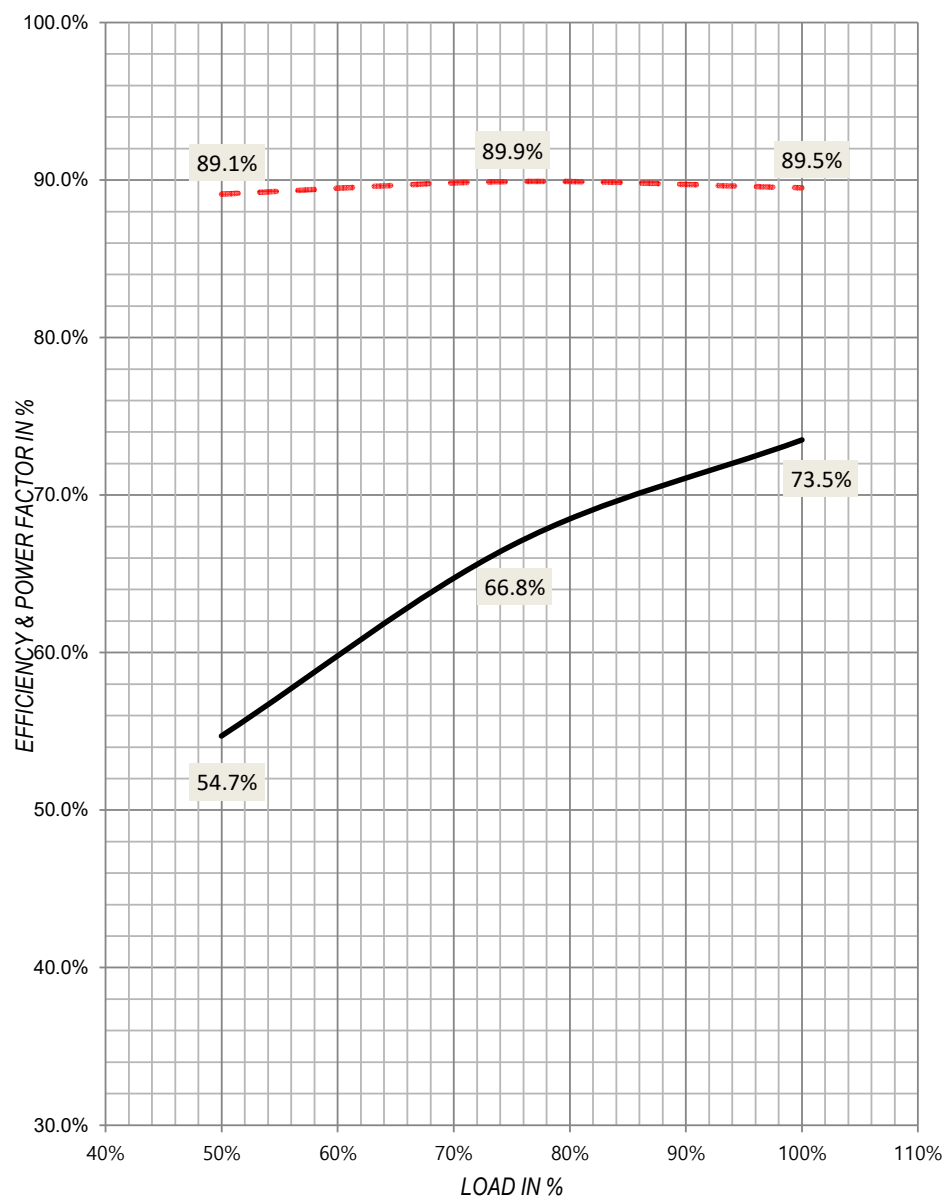

NOTE

- A : LOAD - POWER FACTOR CURVE
 - - - B : LOAD - EFFICIENCY CURVE

HICO

3 PHASE INDUCTION MOTOR

CONNECTION DIAGRAM

ISSUED

12/01/2024

DOUBLE VOLTAGE DELTA CONNECTION		DOUBLE VOLTAGE STAR CONNECTION		SINGLE VOLTAGE STAR-DELTA CONNECTION		DOUBLE VOLTAGE-STAR-DELTA CONNECTION			
LOW VOLTAGE	HIGH VOLTAGE	LOW VOLTAGE	HIGH VOLTAGE	STAR CONNECTION	DELTA CONNECTION	LOW VOLTAGE		HIGH VOLTAGE	
						STAR CONN.	DELTA CONN.	STAR CONN.	DELTA CONN.
DIRECT-ON-LINE STARTING		DIRECT-ON-LINE STARTING		WYE-DELTA STARTING		WYE-DELTA STARTING			

SINGLE VOLTAGE PART-WINDING CONNECTION		DOUBLE VOLTAGE PART WINDING CONNECTION			DOUBLE VOLTAGE-STAR-DELTA AND PART WINDING (at LOW VOLTAGE) CONNECTION					
PART WINDING CONNECTION	RUN	LOW VOLTAGE		HIGH VOLTAGE	LOW VOLTAGE			HIGH VOLTAGE		
		STARTING	RUN		PART-WINDING STARTING	STAR-DELTA STARTING	RUN	STAR-DELTA STARTING	RUN	RUN
PART-WINDING STARTING		LOW VOLTAGE PART-WINDING STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING			LOW VOLTAGE PART-WINDING/STAR-DELTA STARTING HIGH VOLTAGE DIRECT-ON-LINE STARTING					

ALL DATA ABOVE ARE SUBJECTED TO CHANGE WITHOUT NOTICE.